


DANVER


STAINLESS
OUTDOOR
KITCHENS

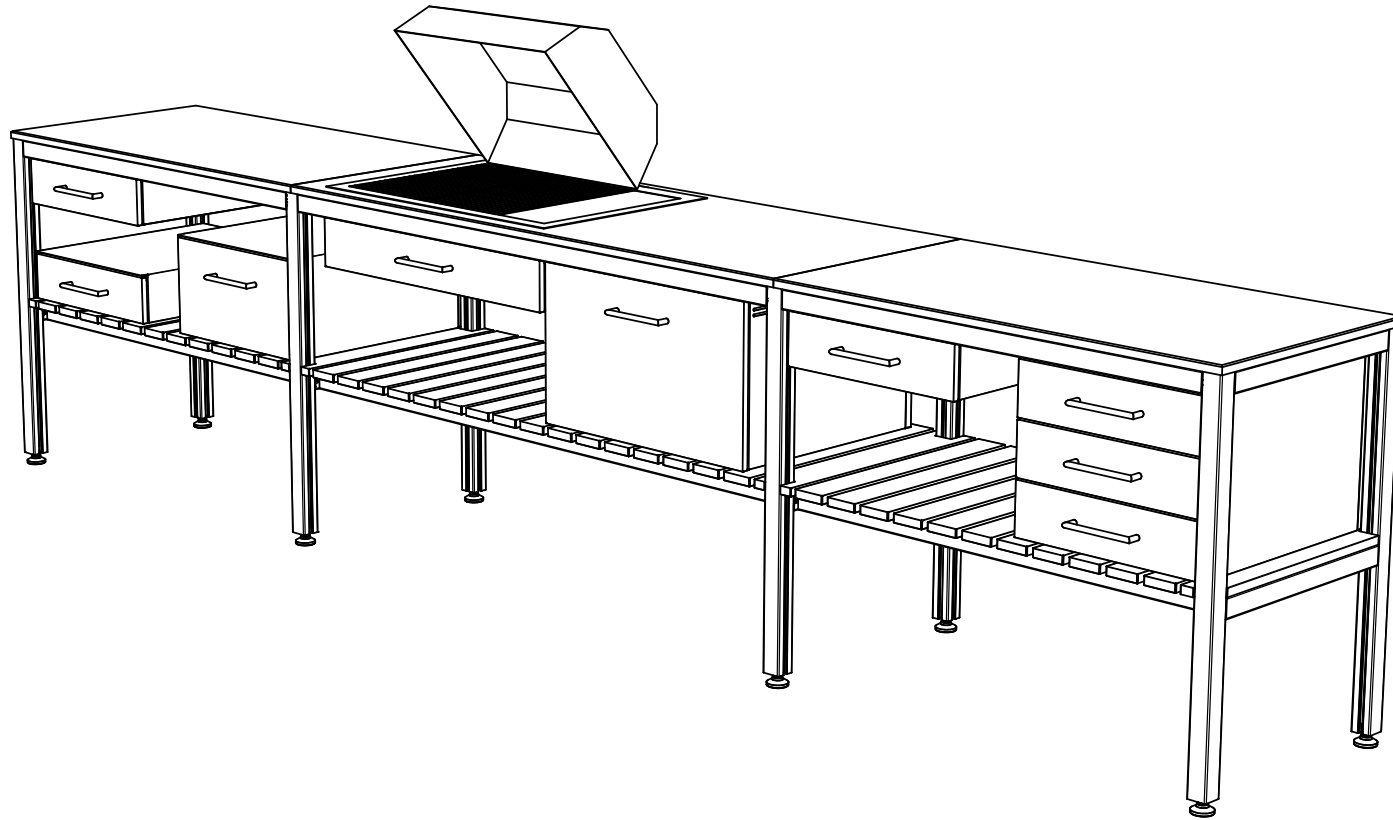

Assembly Guide: Cosmopolitan Kitchen

TABLE OF CONTENTS

IMPORTANT: READ FIRST	3
Stainless Steel Cleaning	3
Unboxing Hardware Required Tools	4
Assembly: Single Kitchen Section	5
Assembly: Attaching Kitchen Sections	11
Assembly: Attaching Shelf Accessory	18
Assembly: Attaching Top Mount Accessory	26

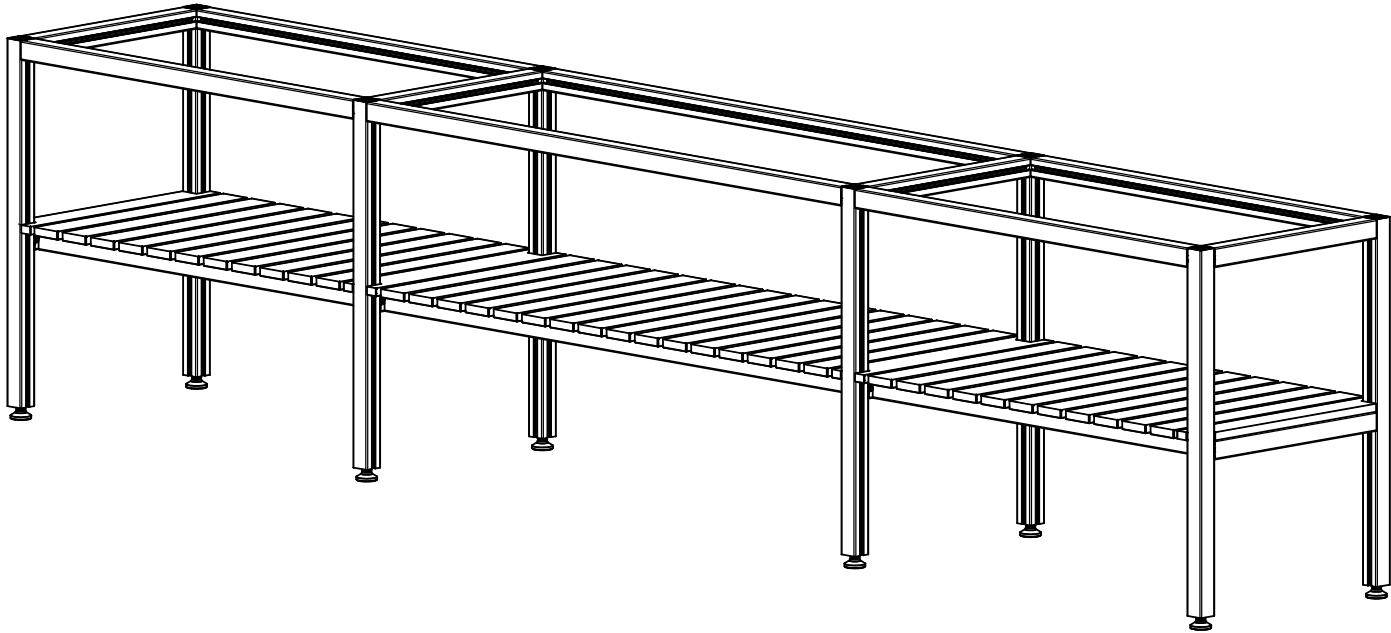

IMPORTANT: READ FIRST

- **DO NOT climb on unit.**
- **DO NOT step or sit on shelves or drawers.**
- **Read and follow each step carefully. It is very important that each step is performed in the correct order.**

Stainless Steel Cleaning

The following are some important tips on cleaning your stainless steel:

- There are a number of reliable stainless steel cleaners on the market
- Use only alkaline, alkaline-chlorinated or non-chloride cleaners
- Avoid hydrochloric acid (muriatic acid) on your stainless steel
- Always use a non-abrasive cleaning tool such as a soft cloth or plastic scouring pad
- Avoid steel pads, wire brushes and scrapers
- Always clean in the direction of the polishing marks by locating the lines or grain and scrub in a motion parallel to them
- If you do end up using a chlorinated cleaner, be sure to rinse thoroughly and dry it, immediately
- Air dry your equipment

Resources

For additional resources, such as installation videos, PDF instructions or cleaning guides, visit: danver.com/resources

Unboxing

Unboxing Instructions

- Ensure a clear and safe space for assembly.
- Remove Ends, Transitions, Rails and Shelf from box.
- Locate and remove the hardware kits.
- Make sure adequate hardware is present for number of sections purchased

Hardware

DESCRIPTION	QTY.
T-Bolts	4 per Section
M8 Flange Nuts	4 per Section
1/4-20 Bolts	4 per Shelf Accessory

Required Tools



- Allen Wrench (provided)
- Power Screw Driver with #2 Phillips Head Bit
- #2 Phillips head manual screw driver
- Adjustable Wrench
- Level

ASSEMBLY: Single Kitchen Section




Two people are required for this step


1. Slide Connectors on Rail into Channels on Legs.

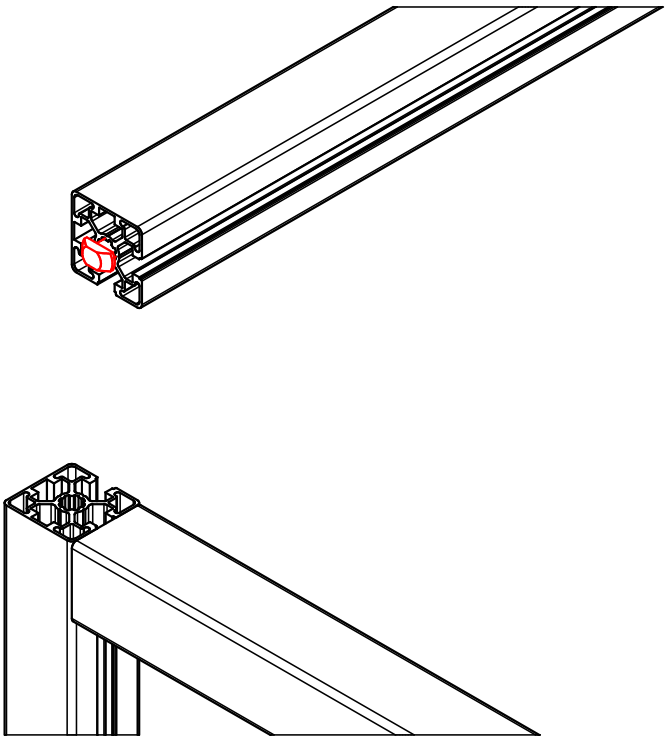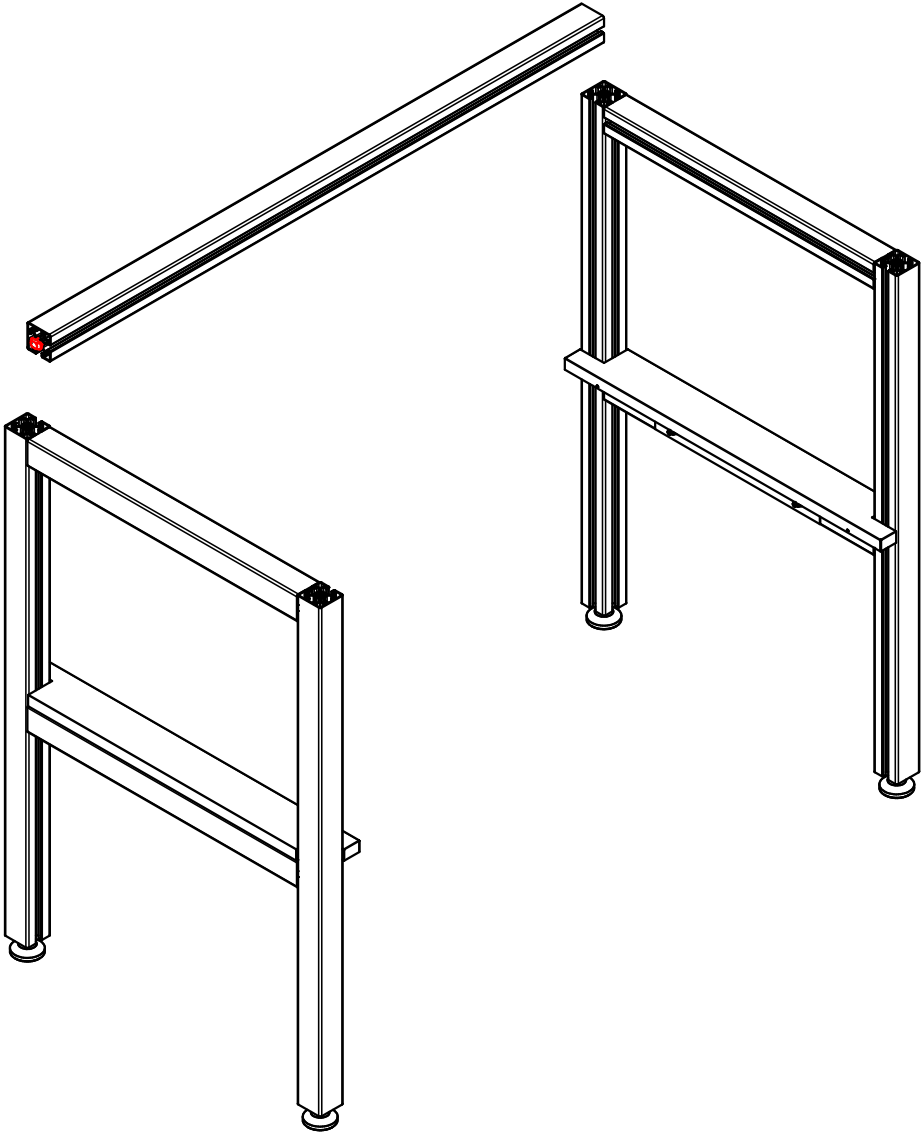


ASSEMBLY: Single Kitchen Section

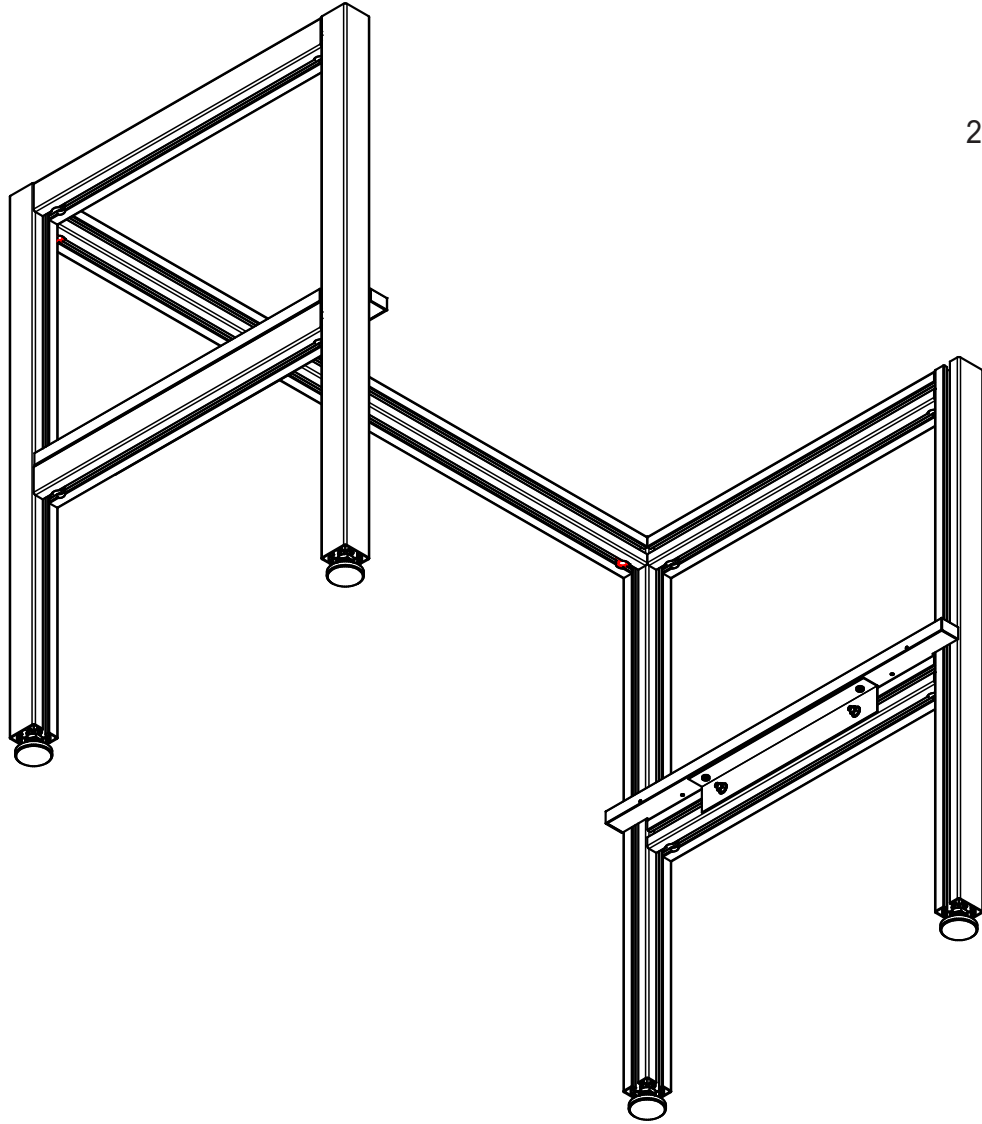


2. Align Rail Flush with Top of Leg and Tighten Connectors (2x).

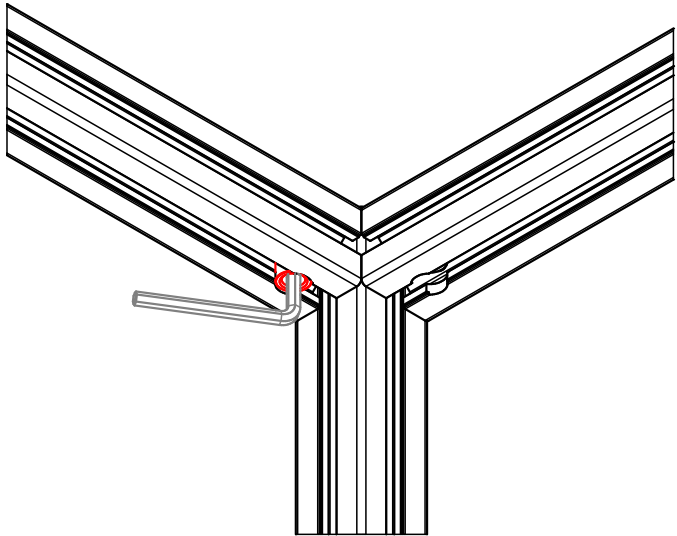

ASSEMBLY: Single Kitchen Section

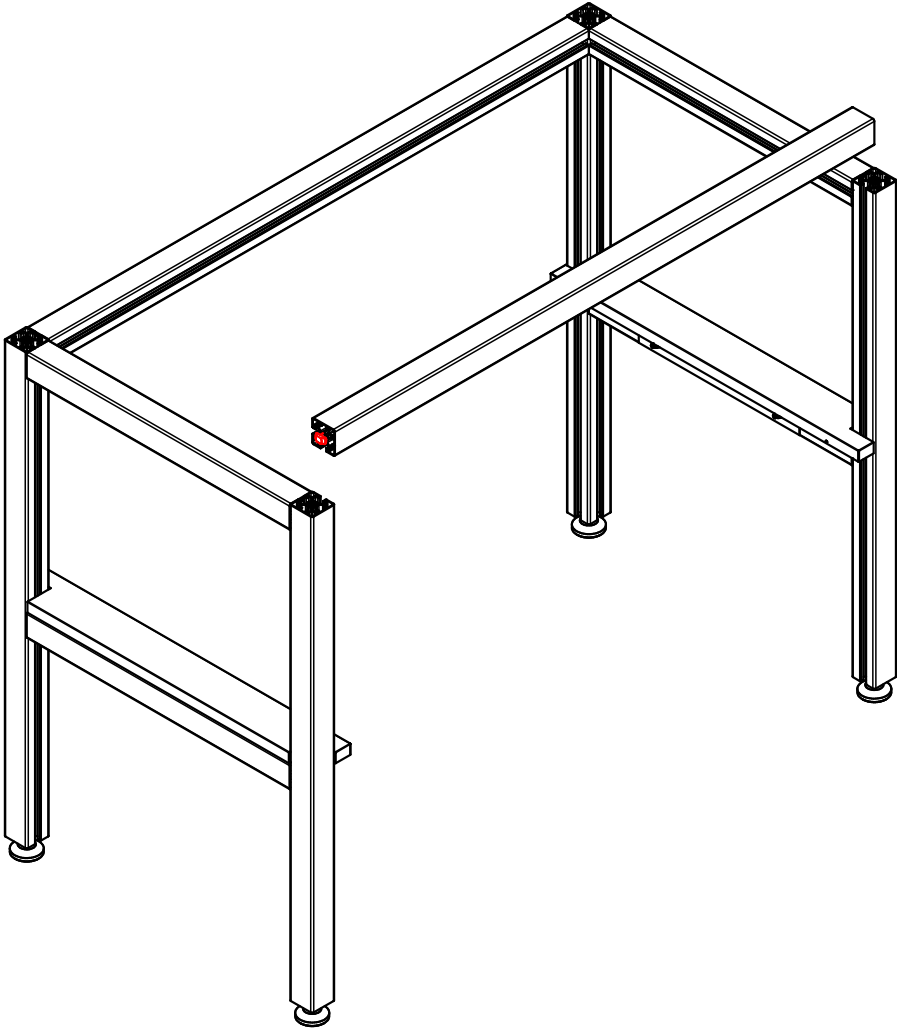


3. Slide Connectors on Rail into Channels on Legs.

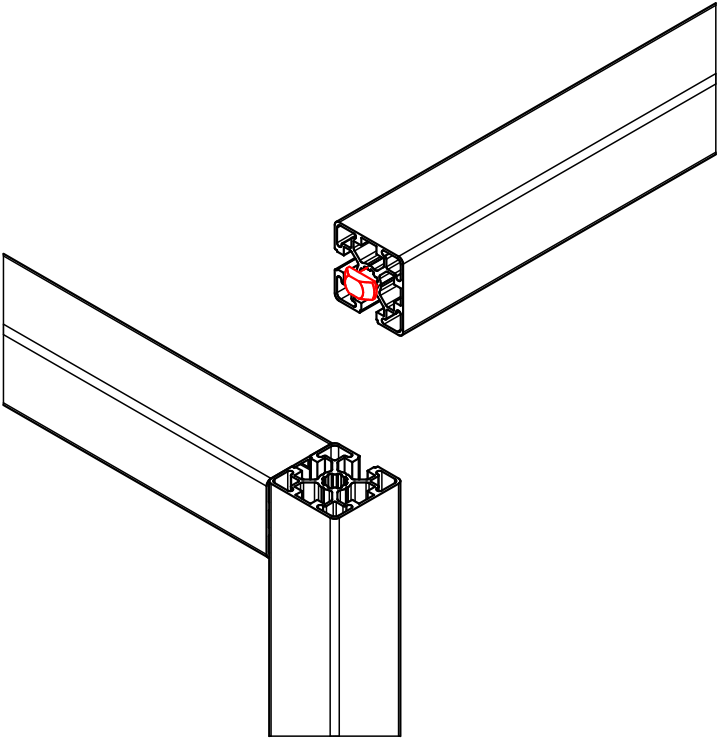


ASSEMBLY: Single Kitchen Section

4. Align Rail Flush with Top of Leg and Tighten Connectors (2x).

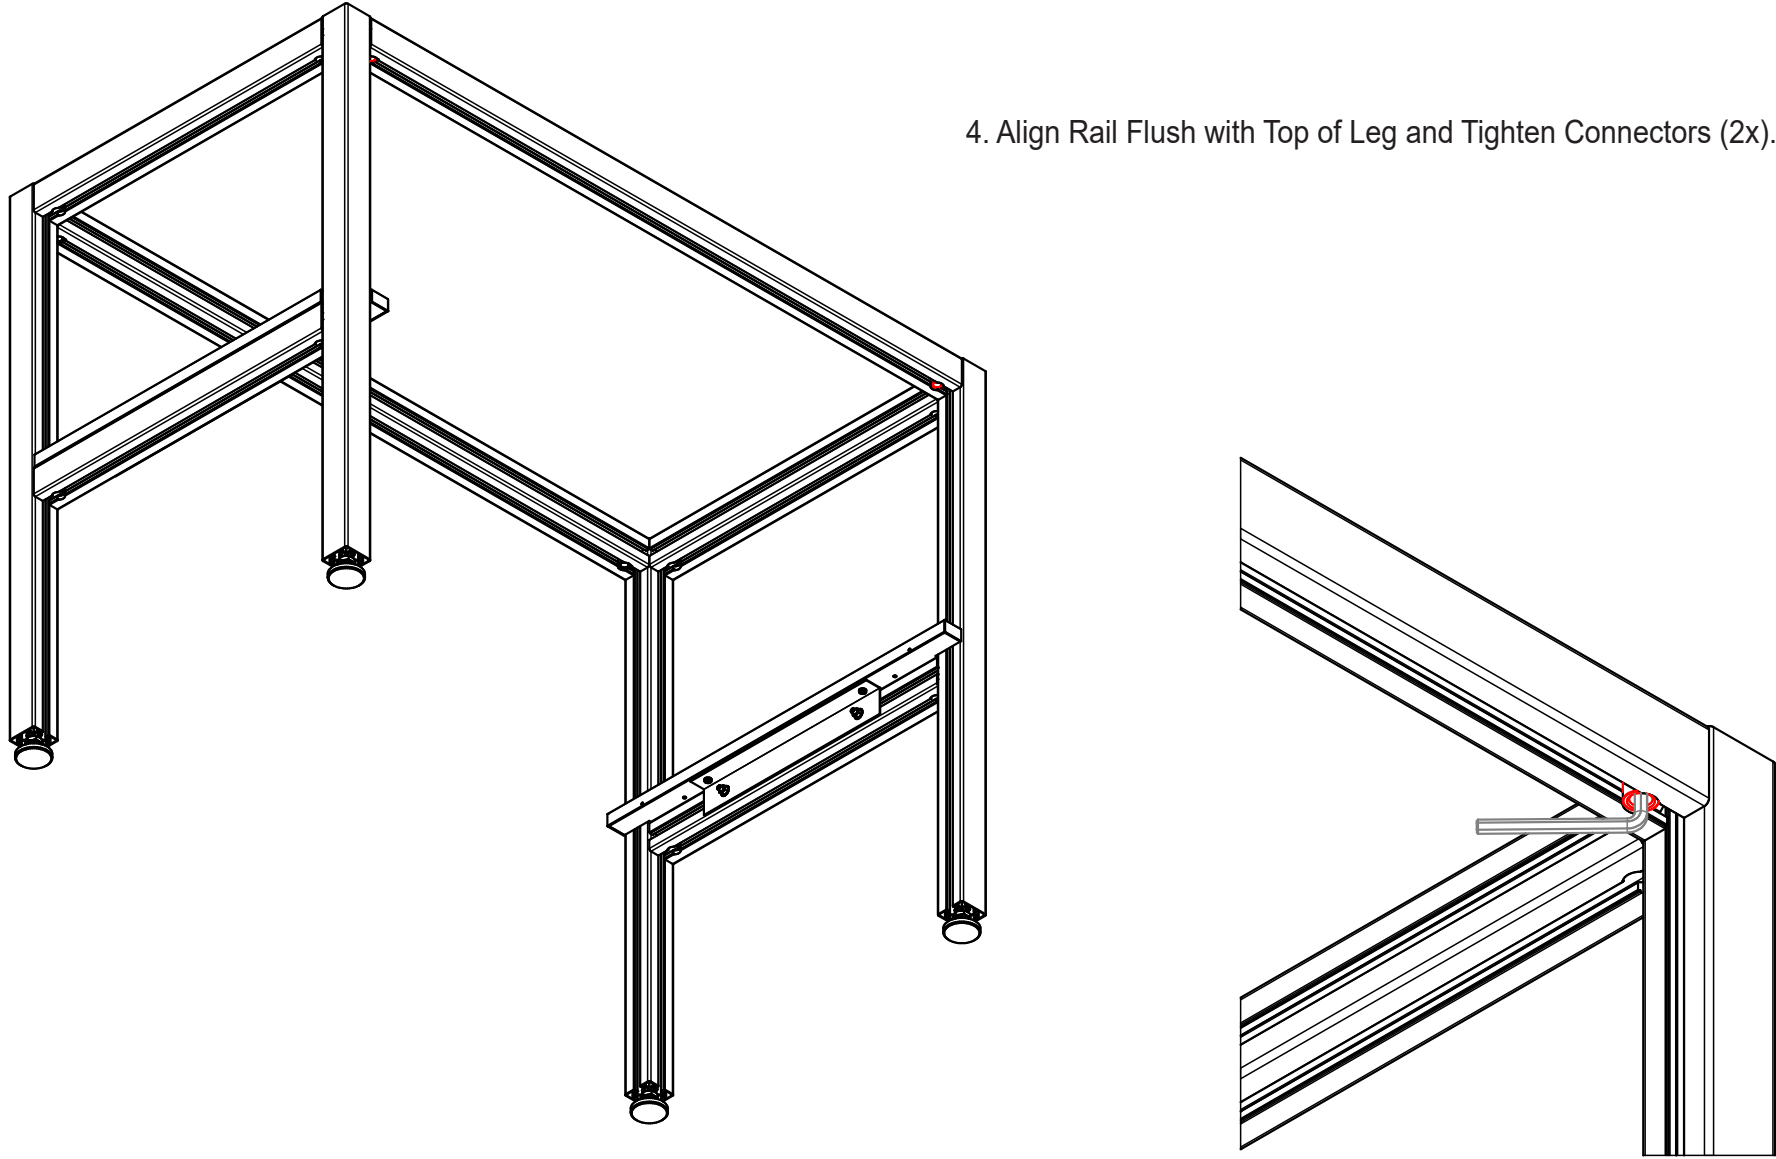


ASSEMBLY: Single Kitchen Section

5. Align Gussets on Shelf with Lower Crossmembers on Ends.

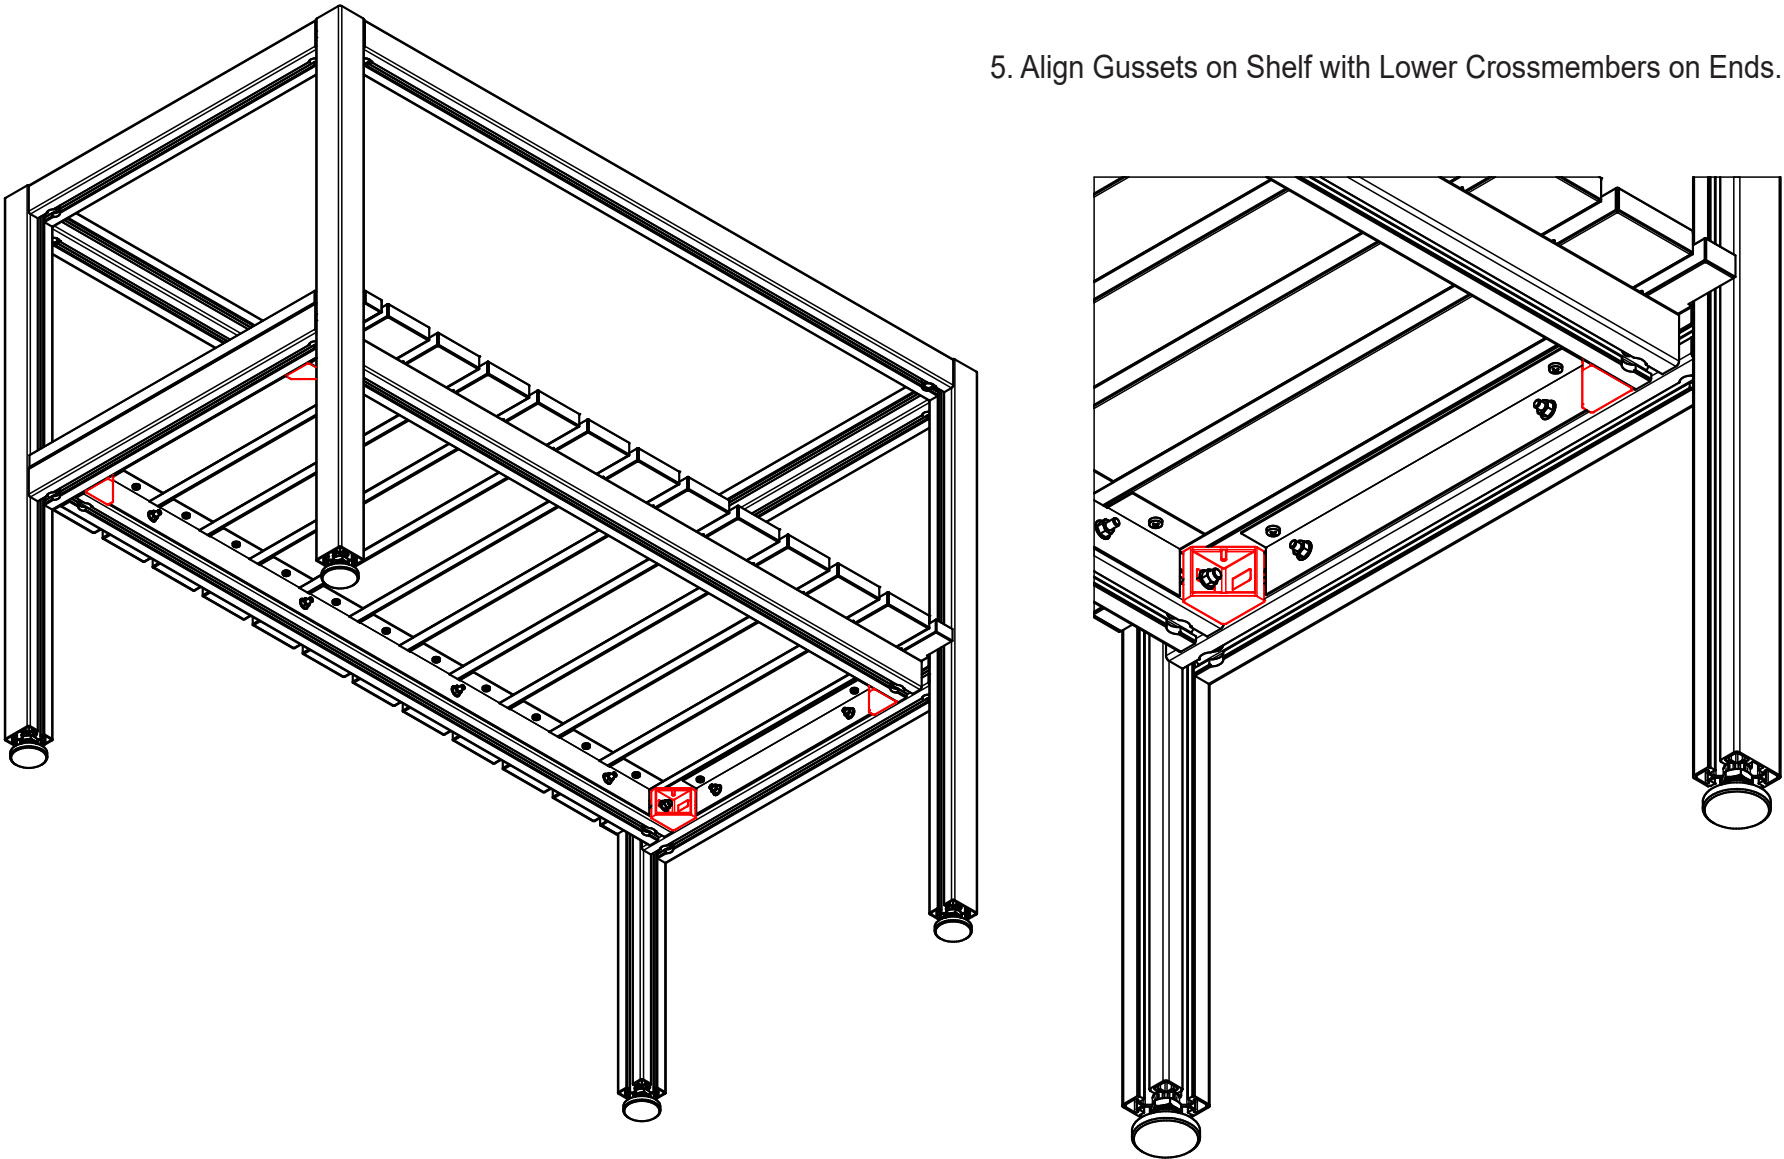


ASSEMBLY: Single Kitchen Section

6. Insert T-Bolts (4x) into Gussets. Secure with M8 Flange Nuts (4x)

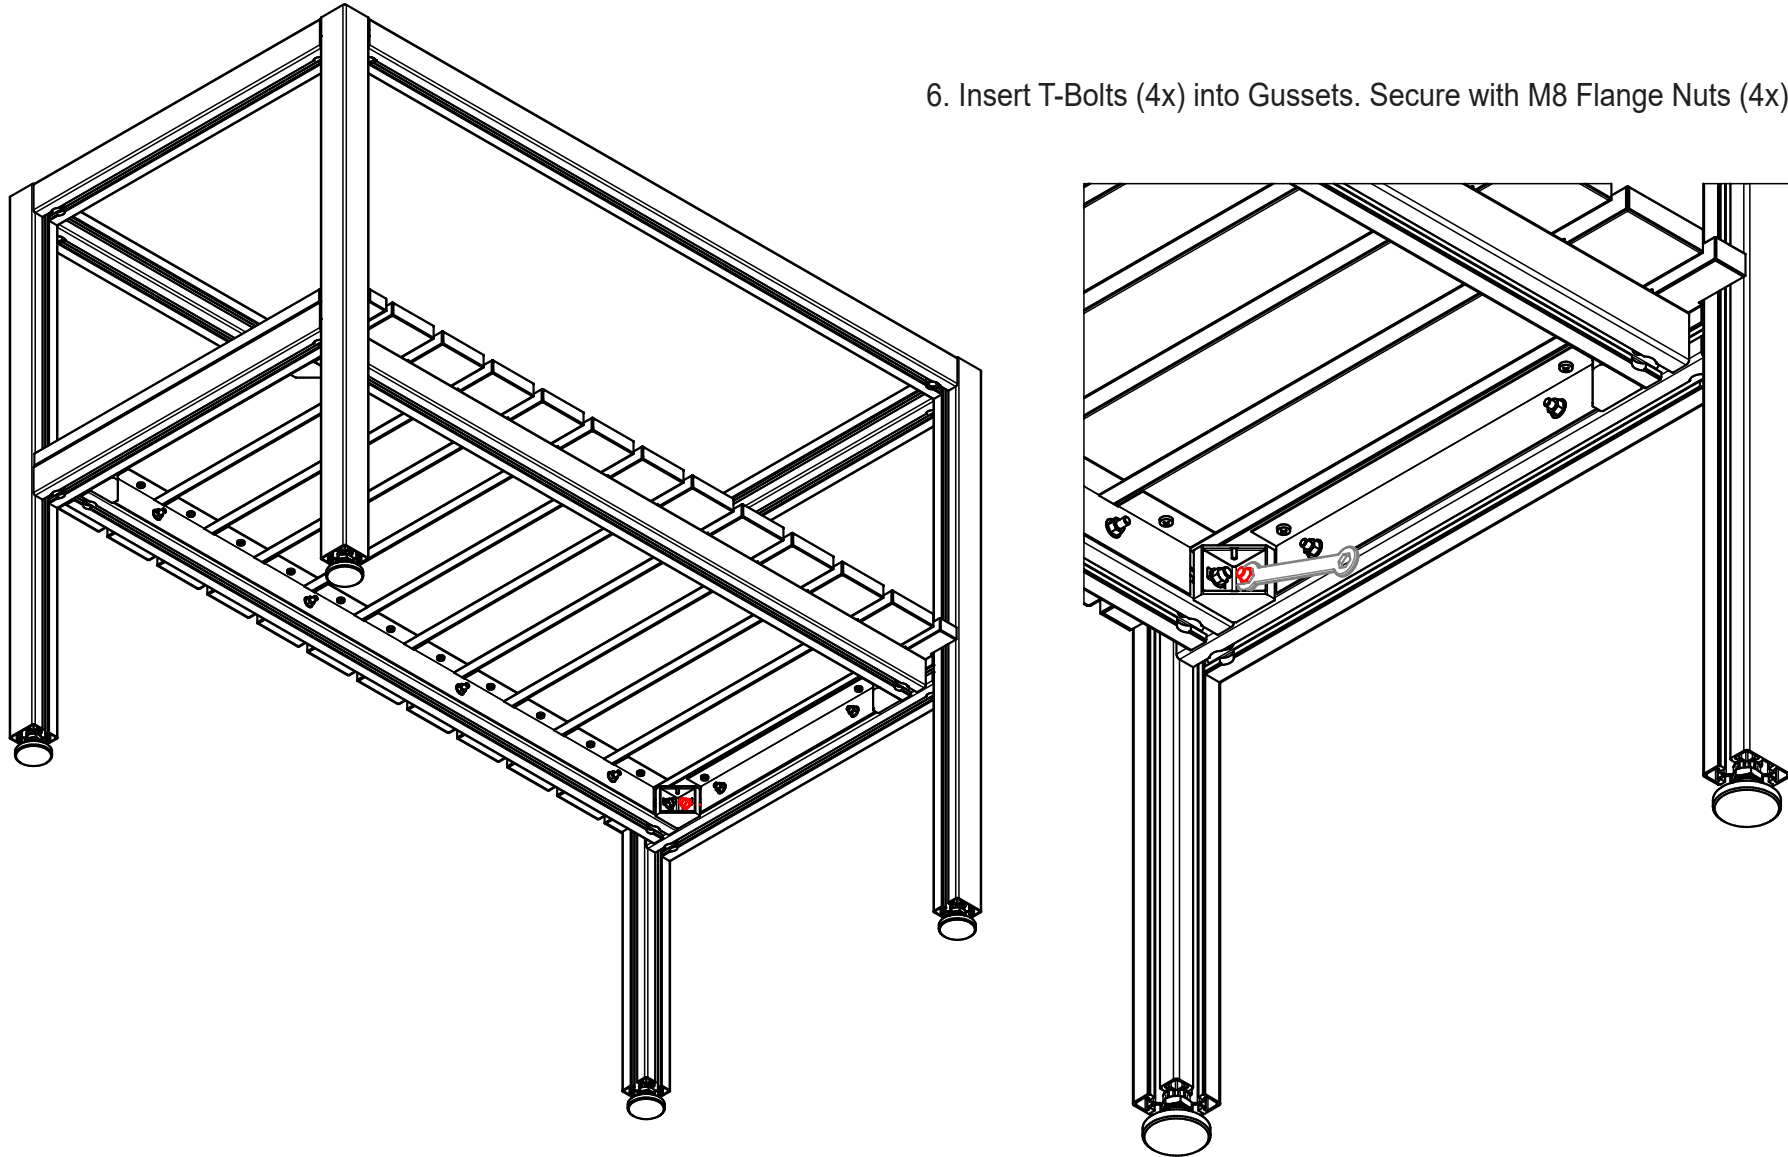

ASSEMBLY: Attaching Kitchen Sections


1. Slide Connectors on Rail into Channels on Legs.

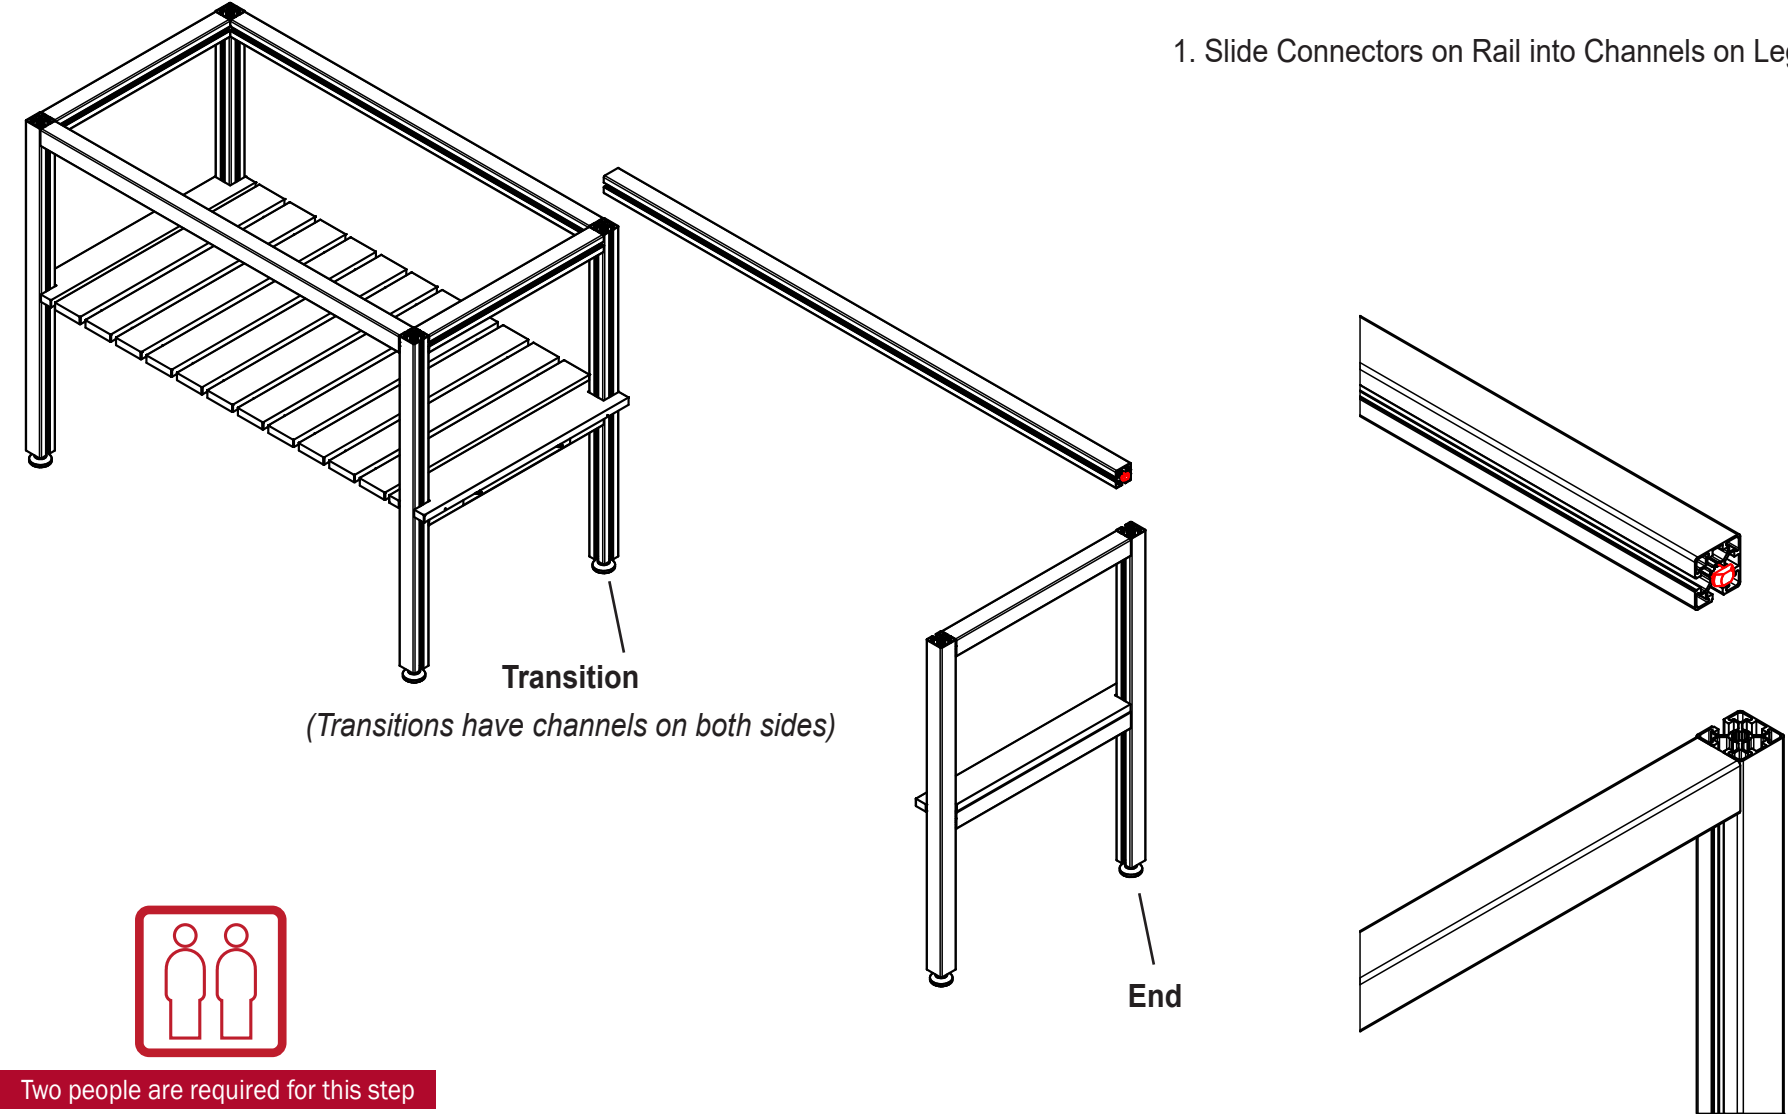

Two people are required for this step


ASSEMBLY: Attaching Kitchen Sections

2. Align Rail Flush with Top of Leg and Tighten Connectors (2x).

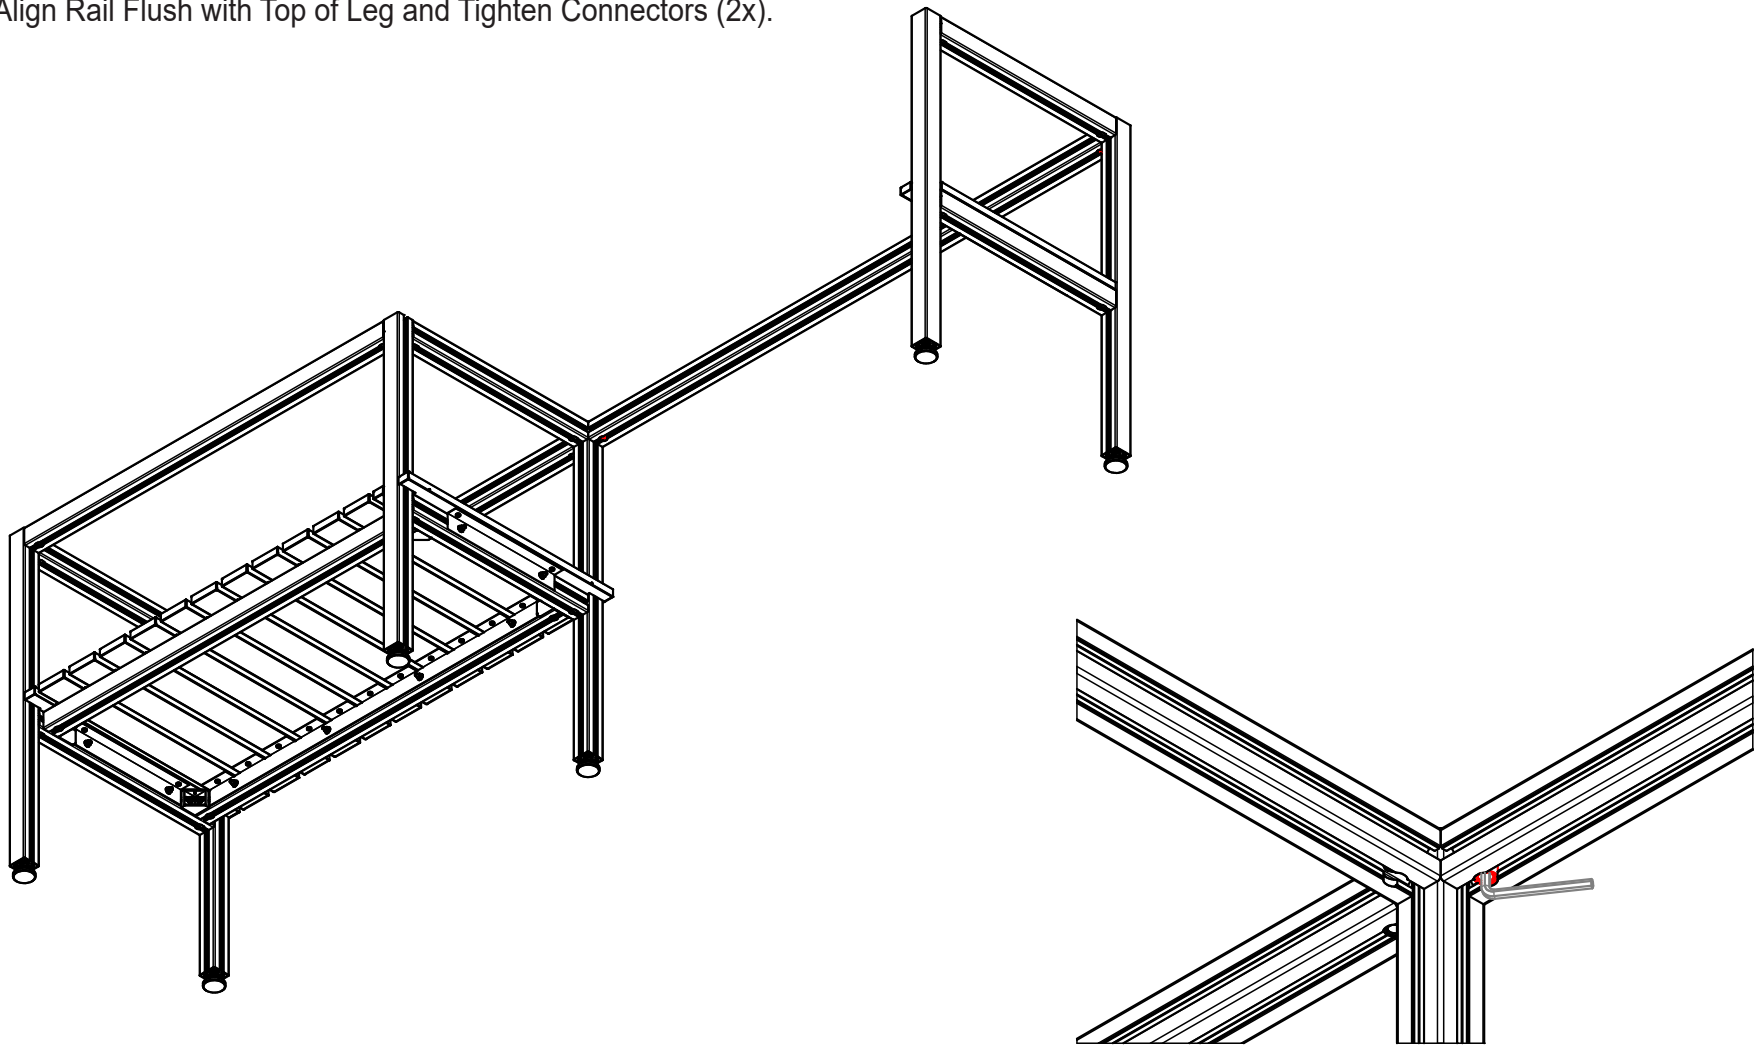


ASSEMBLY: Attaching Kitchen Sections

3. Slide Connectors on Rail into Channels on Legs.

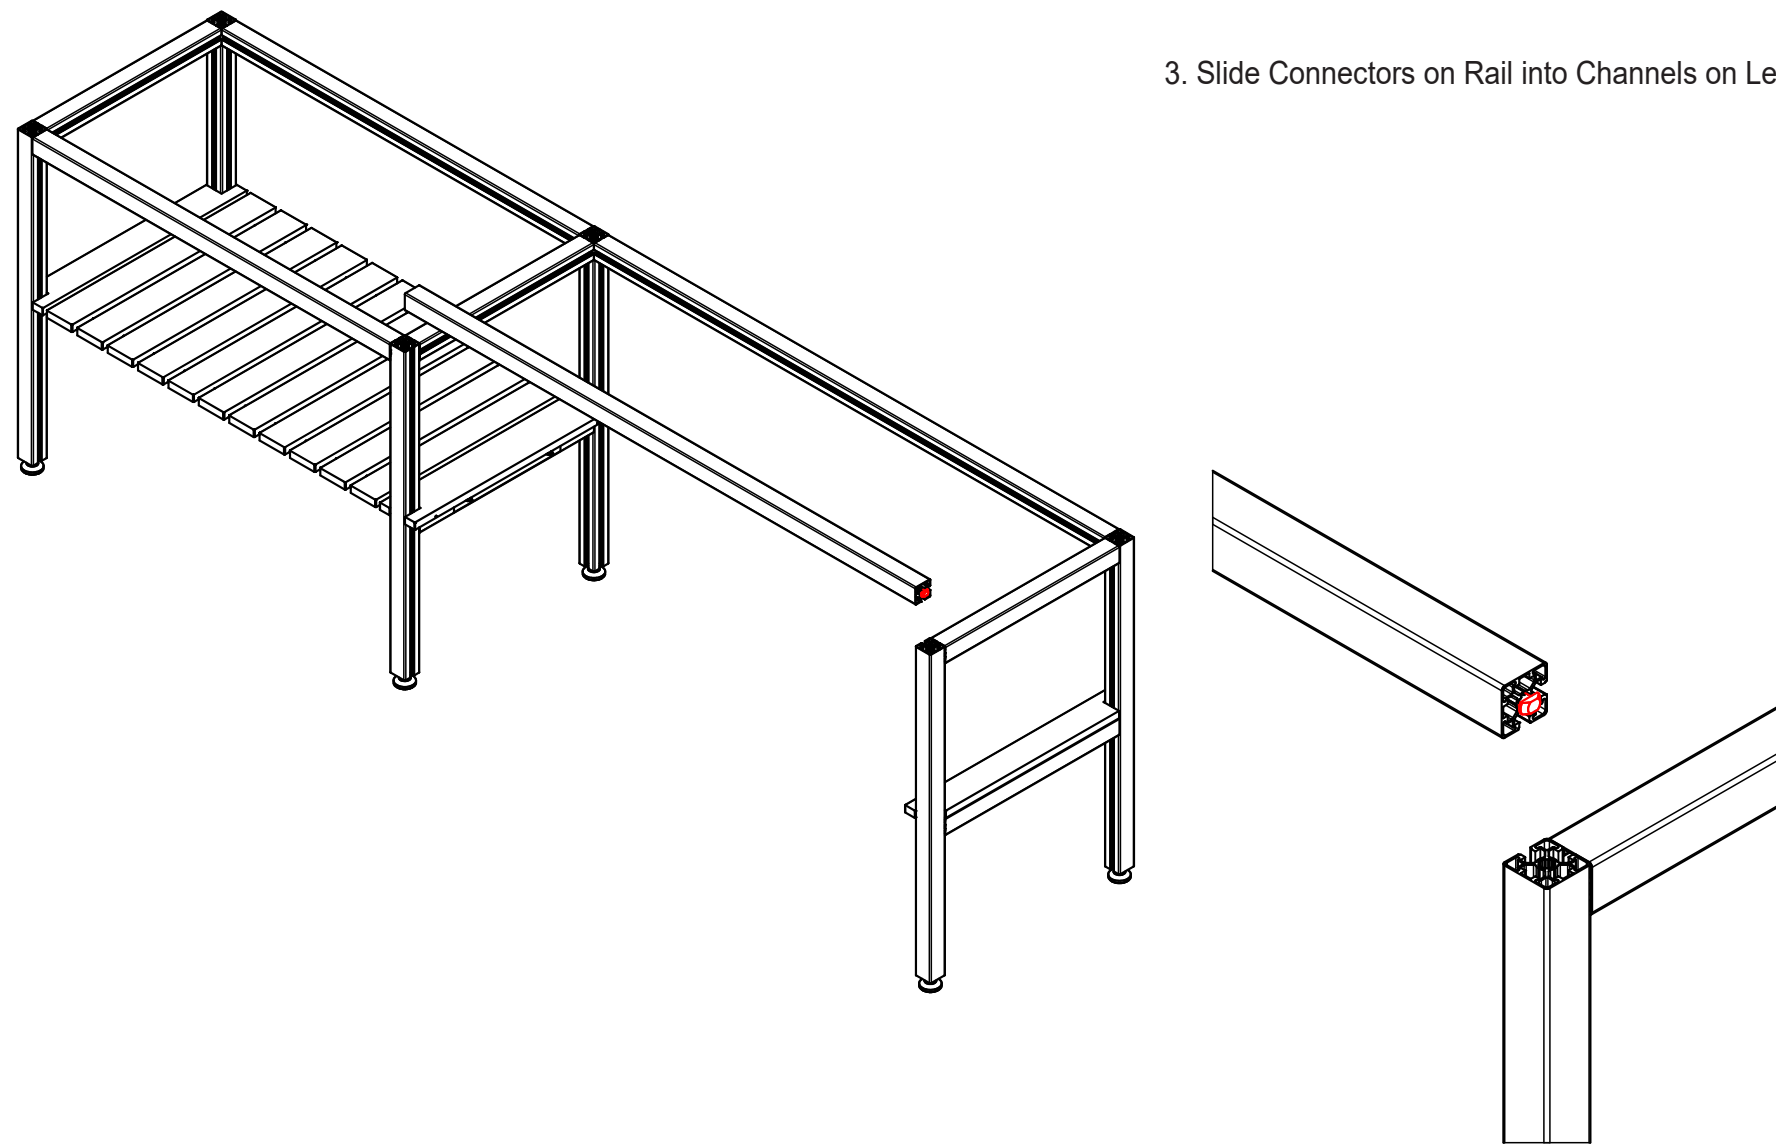


ASSEMBLY: Attaching Kitchen Sections

4. Align Rail Flush with Top of Leg and Tighten Connectors (2x).

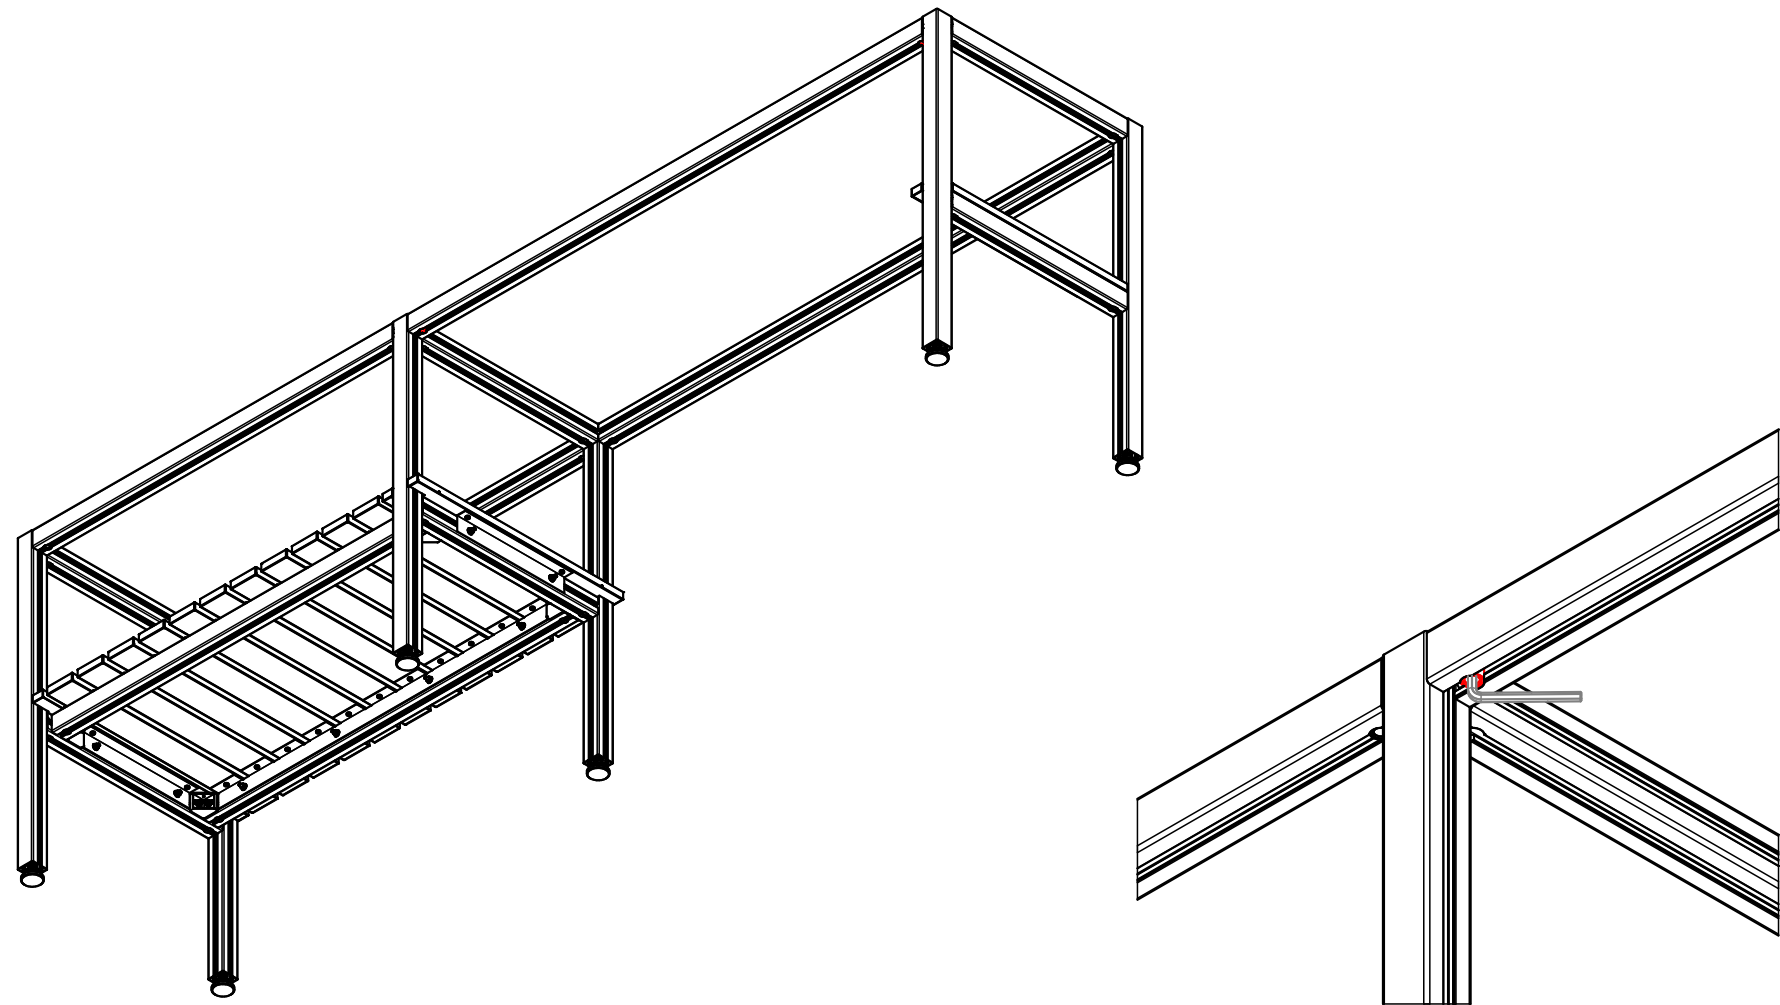


ASSEMBLY: Attaching Kitchen Sections

5. Align Gussets on Shelf with Lower Crossmembers on Ends.

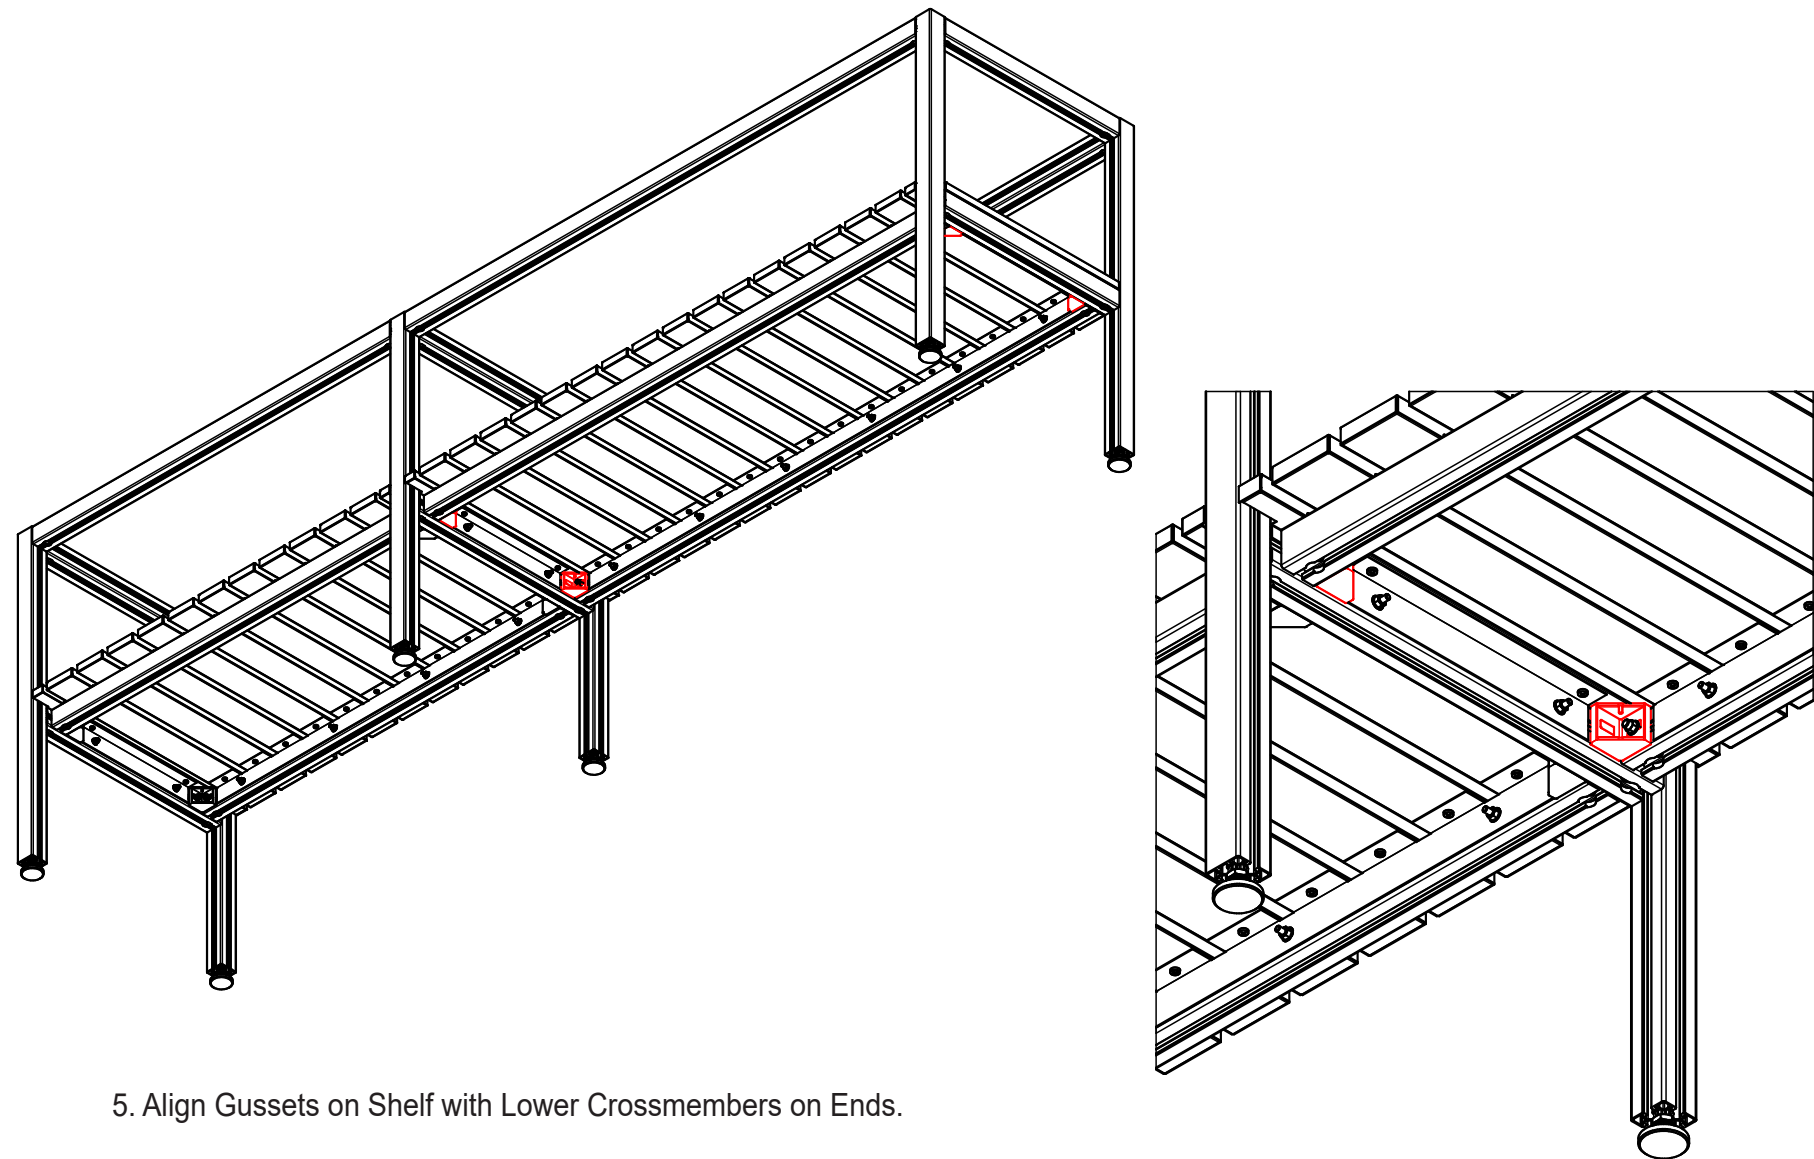


ASSEMBLY: Attaching Kitchen Sections

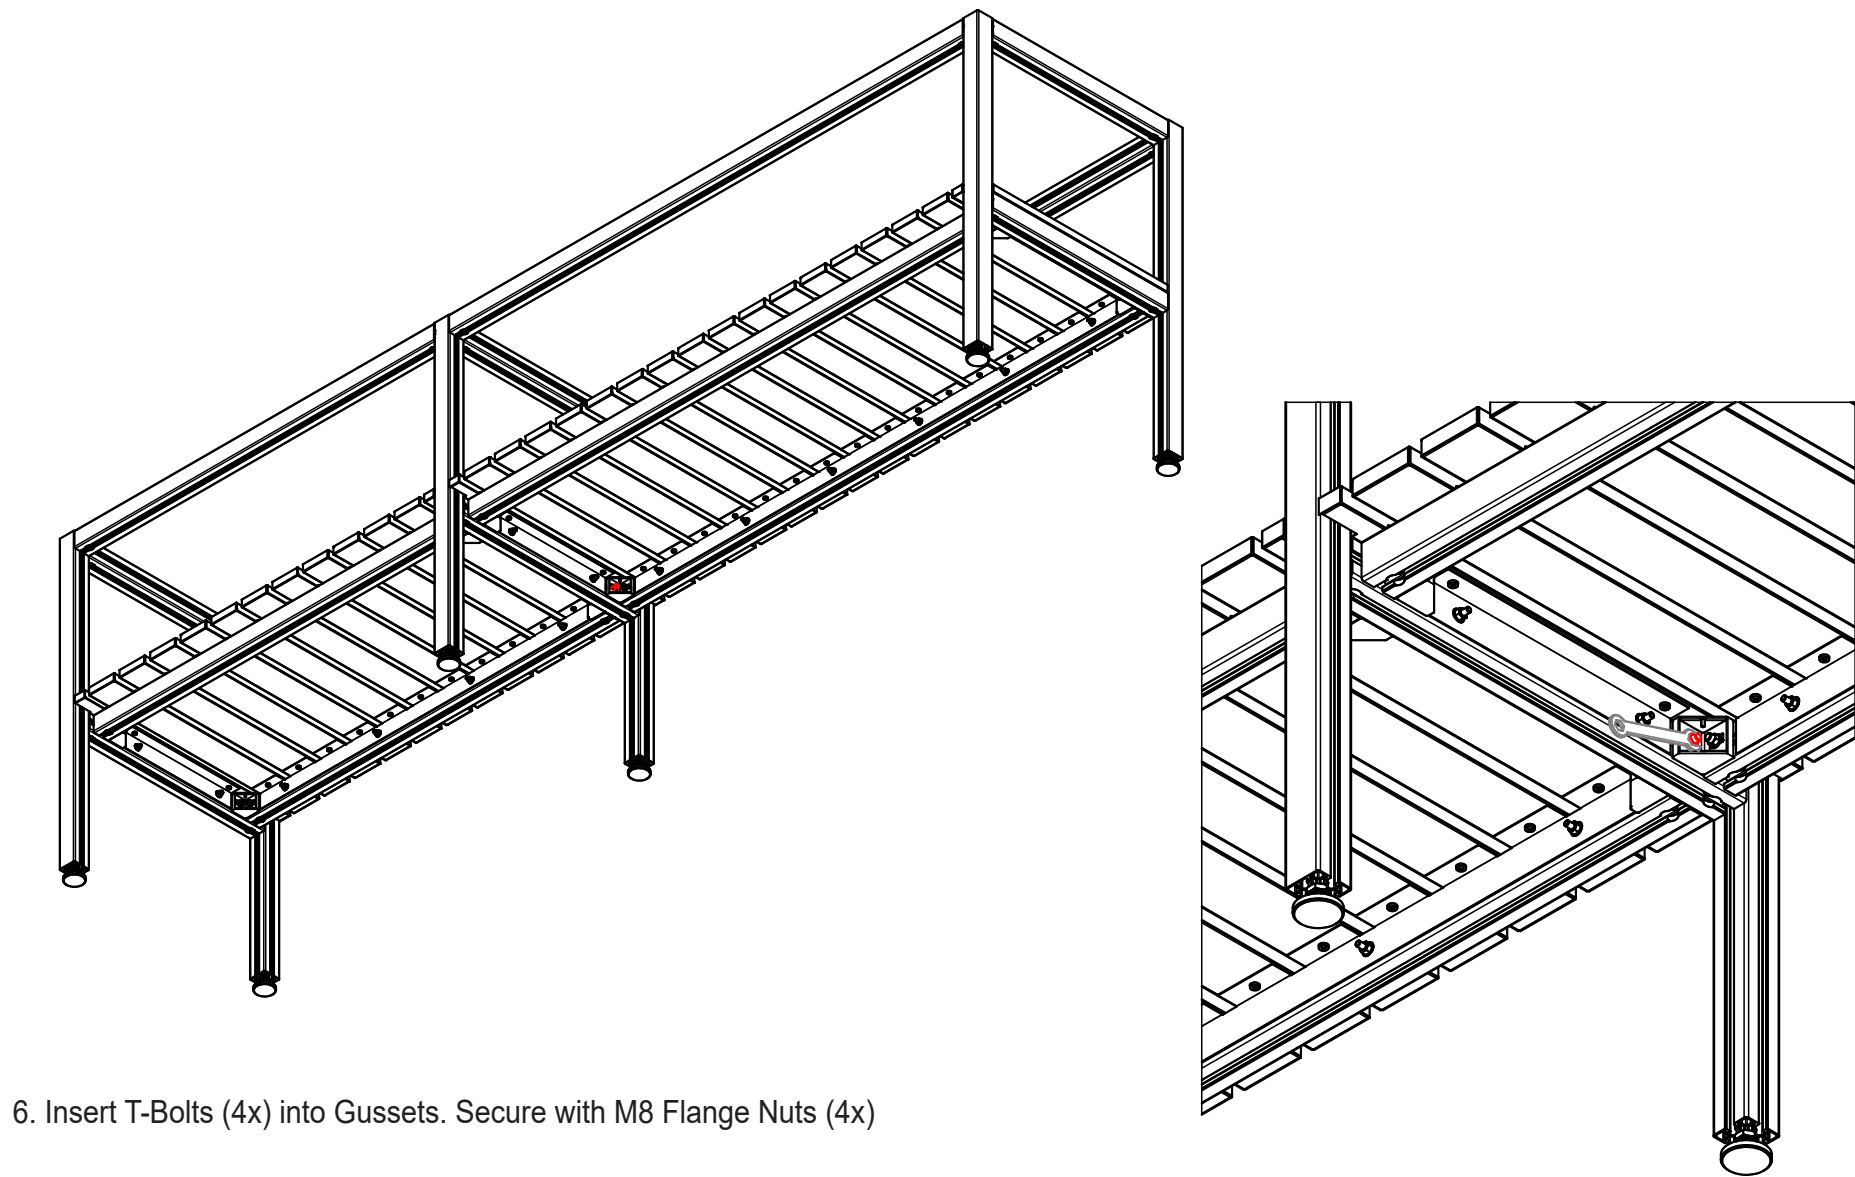


6. Insert T-Bolts (4x) into Gussets. Secure with M8 Flange Nuts (4x)

ASSEMBLY: Attaching Shelf Accessory

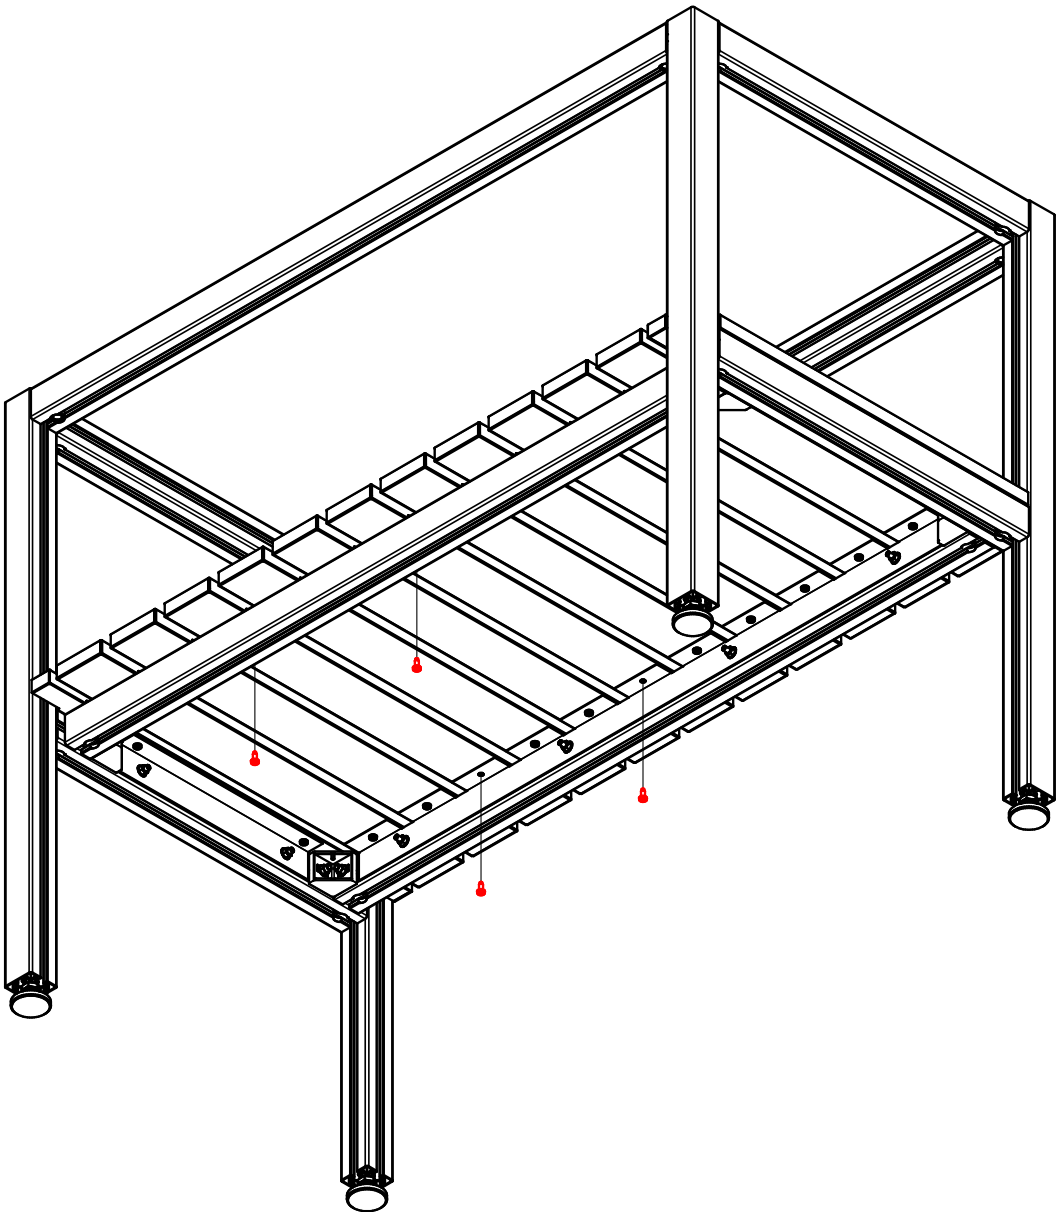


1. Remove Screws (4x) from Required Slats.

ASSEMBLY: Attaching Shelf Accessory

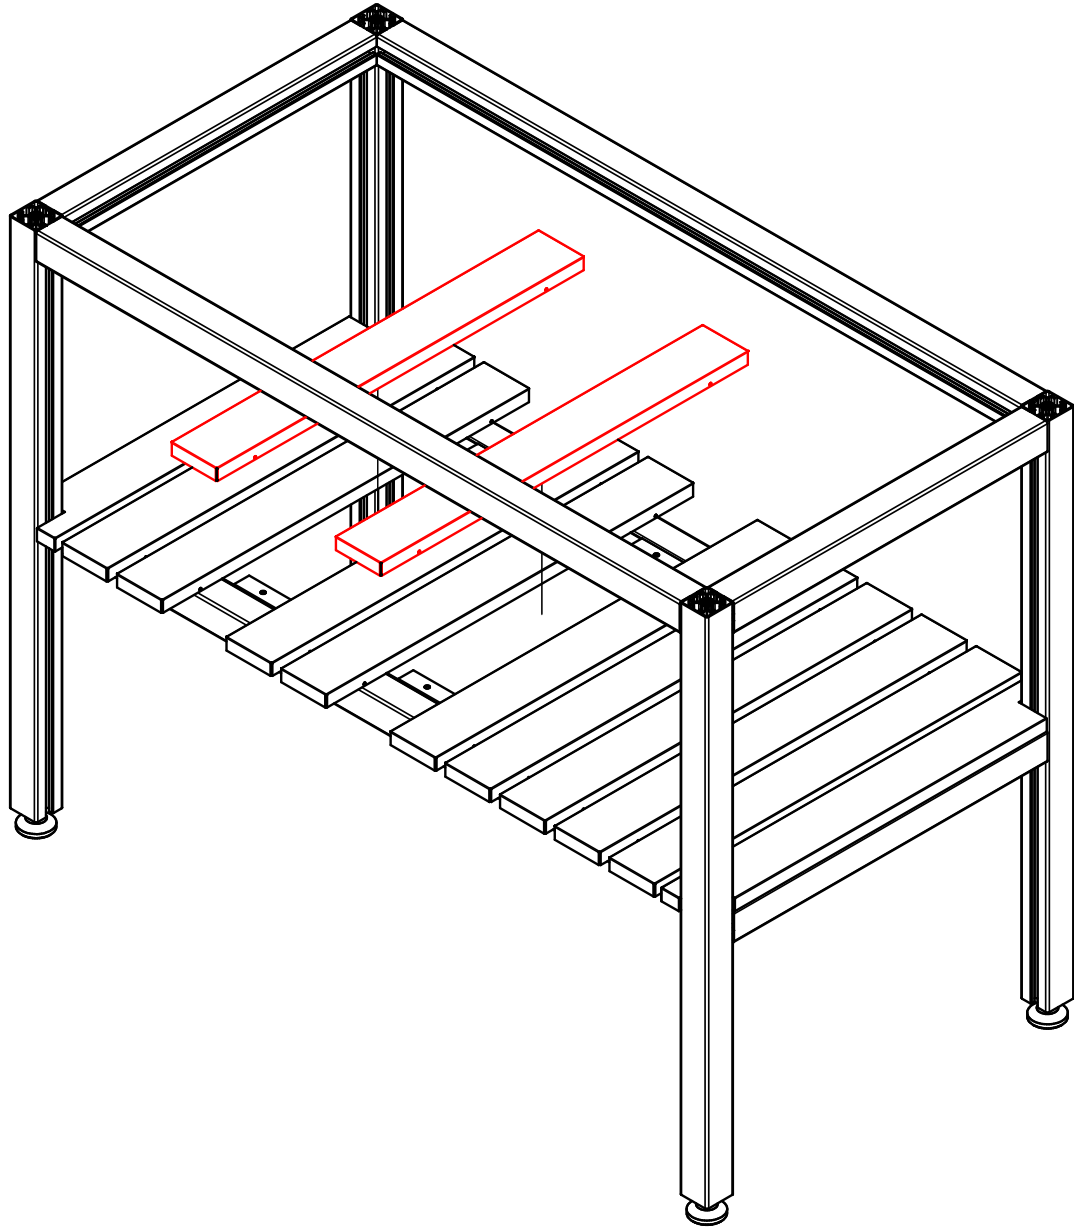


2. Remove Original Slats from Shelf.

ASSEMBLY: Attaching Shelf Accessory

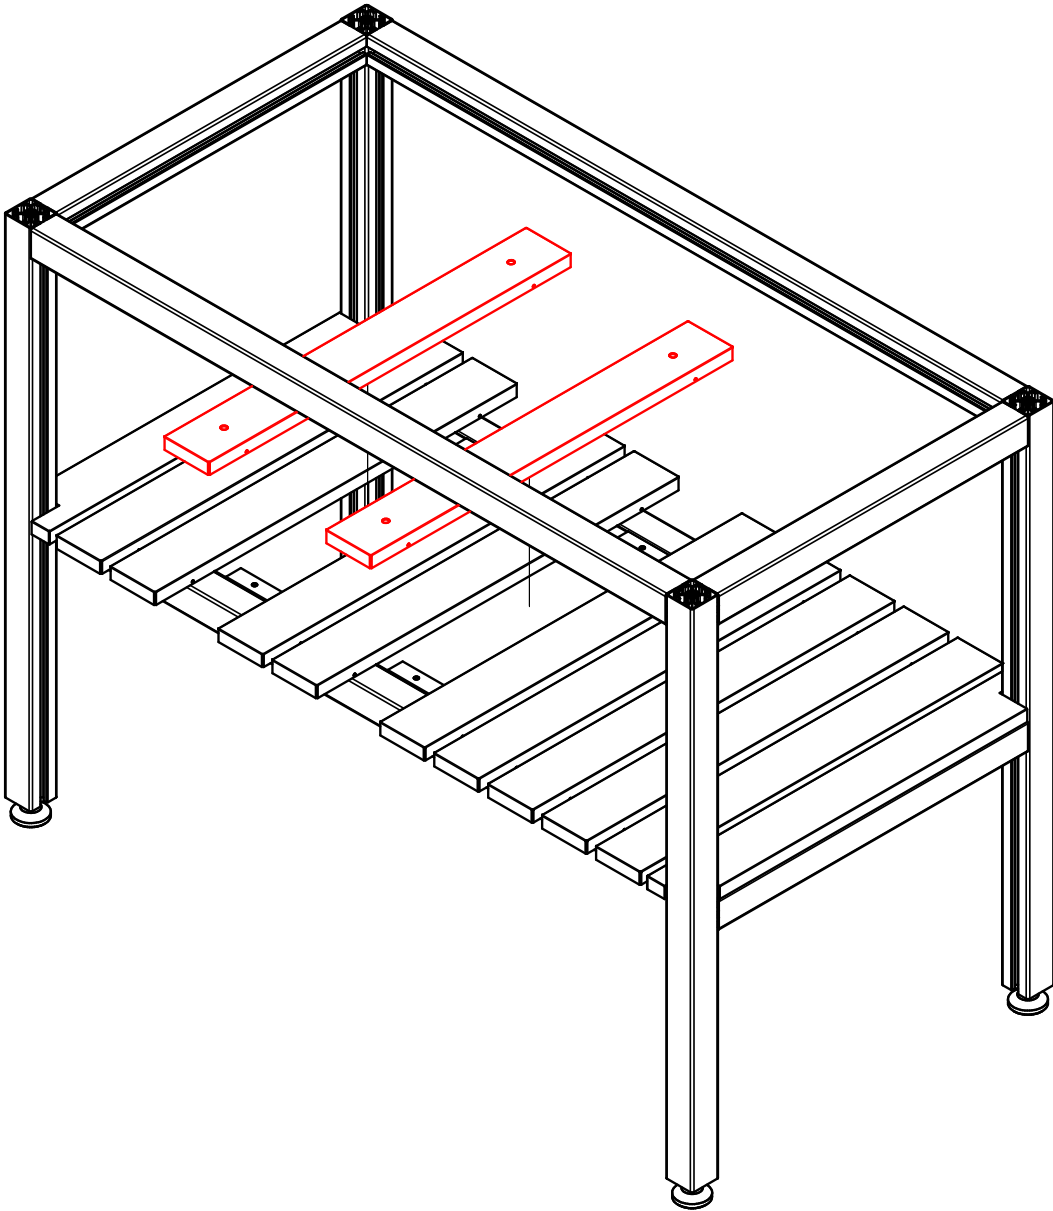


3. Place Attachment Slats on Shelf

ASSEMBLY: Attaching Shelf Accessory

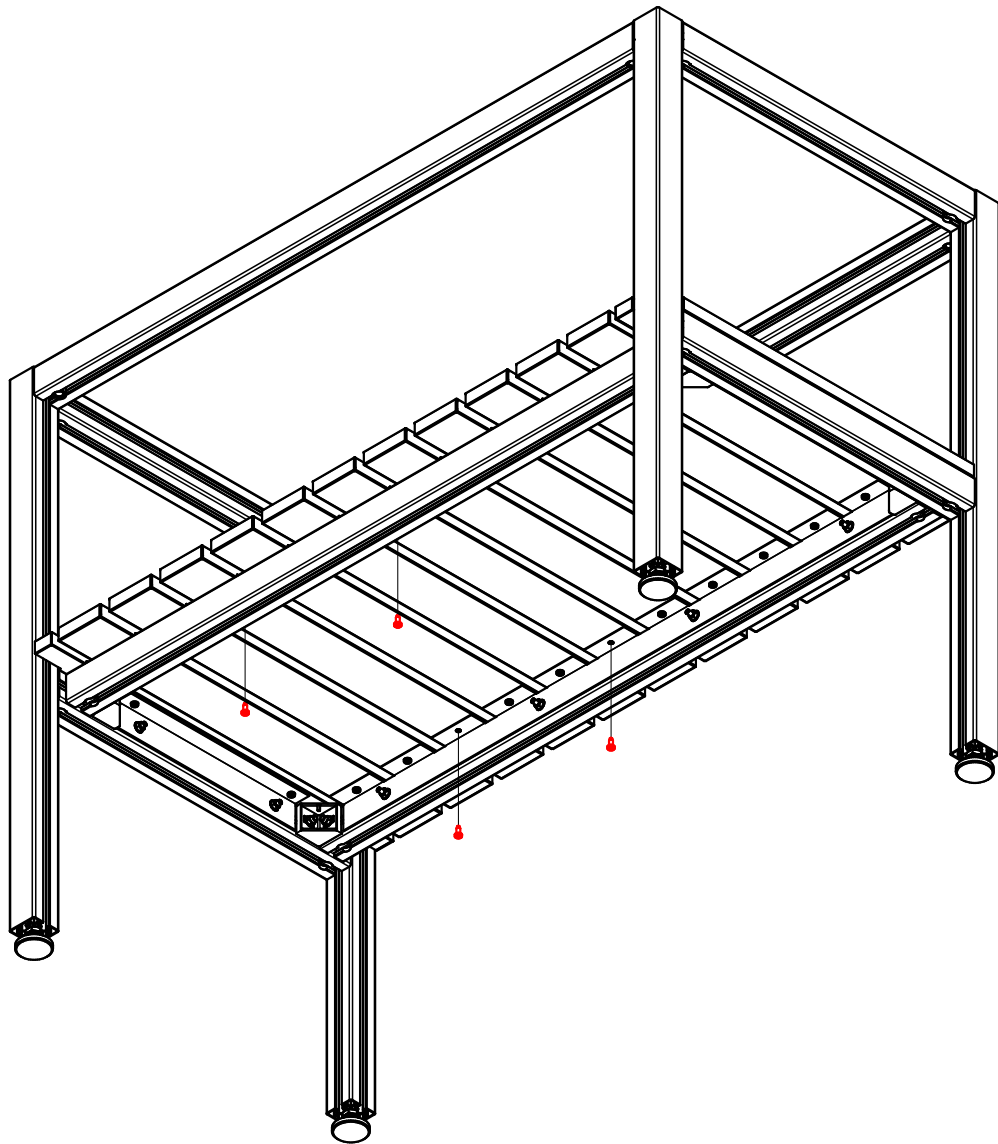


4. Fasten Attachment Slats to Shelf with Screws (4x).

ASSEMBLY: Attaching Shelf Accessory

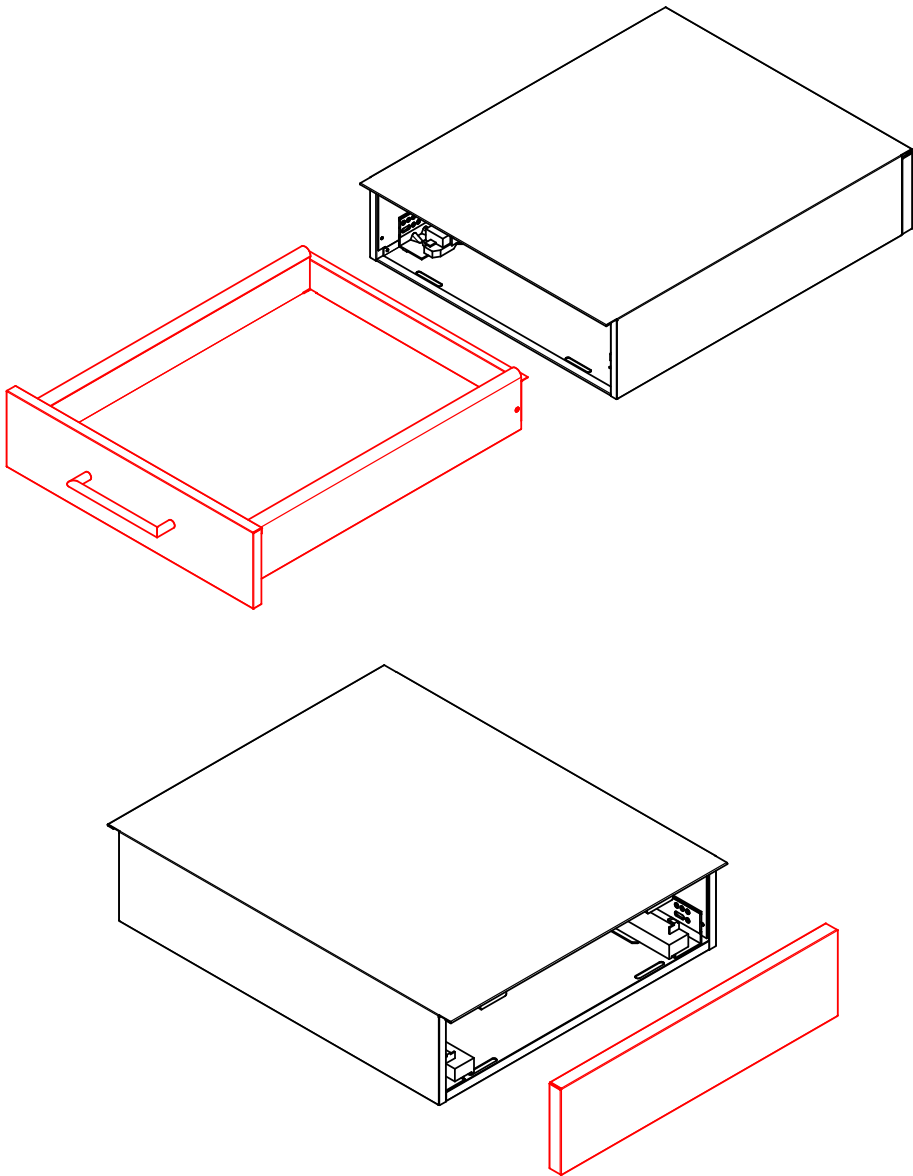


5. Remove Drawer(s) from Storage Box.


6. Remove Magnetic Back Panel from Storage Box.

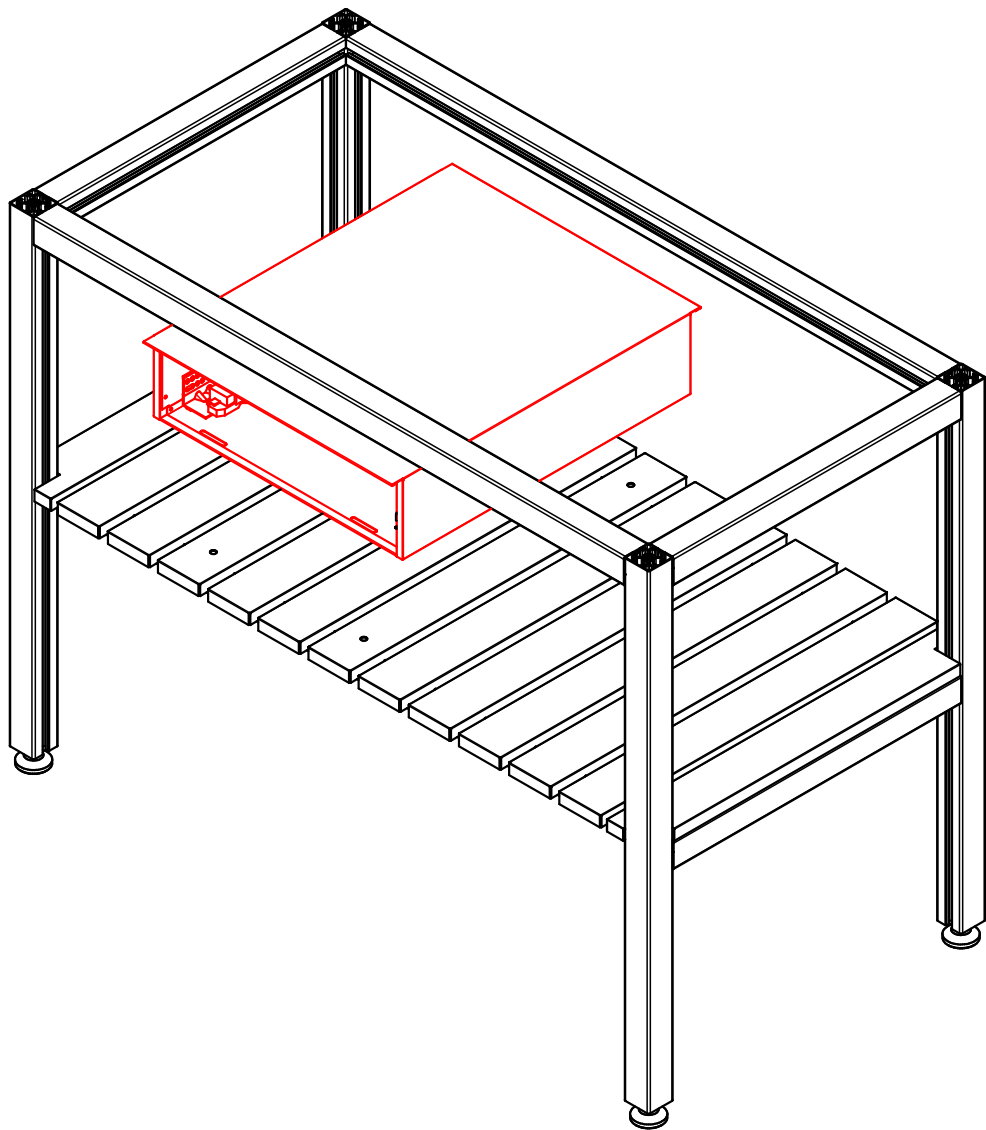


7. Place Storage Box on Shelf, Align Slots on Bottom of Storage Box with Holes on Attachment Slats.

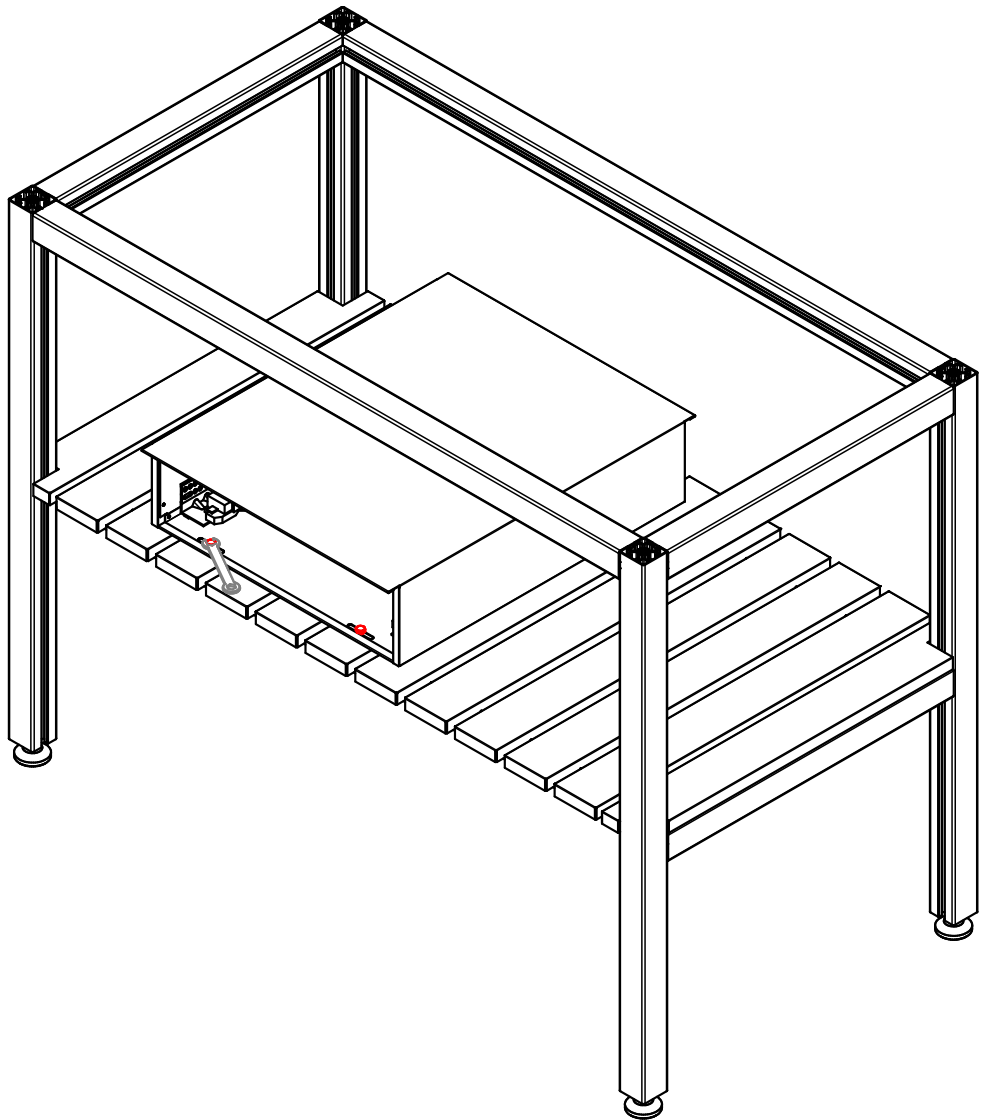


8. Fasten Storage Box to Shelf using 1/4-20 Bolts (4x).

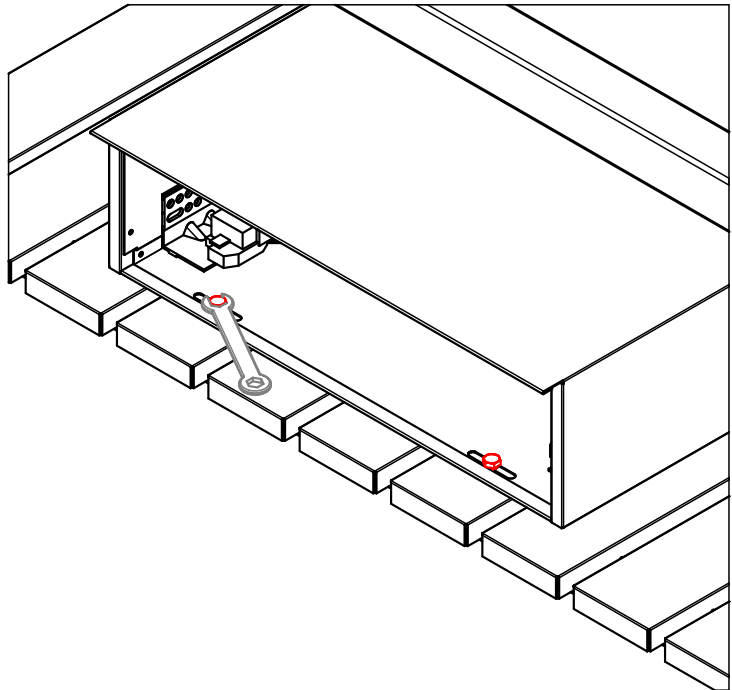

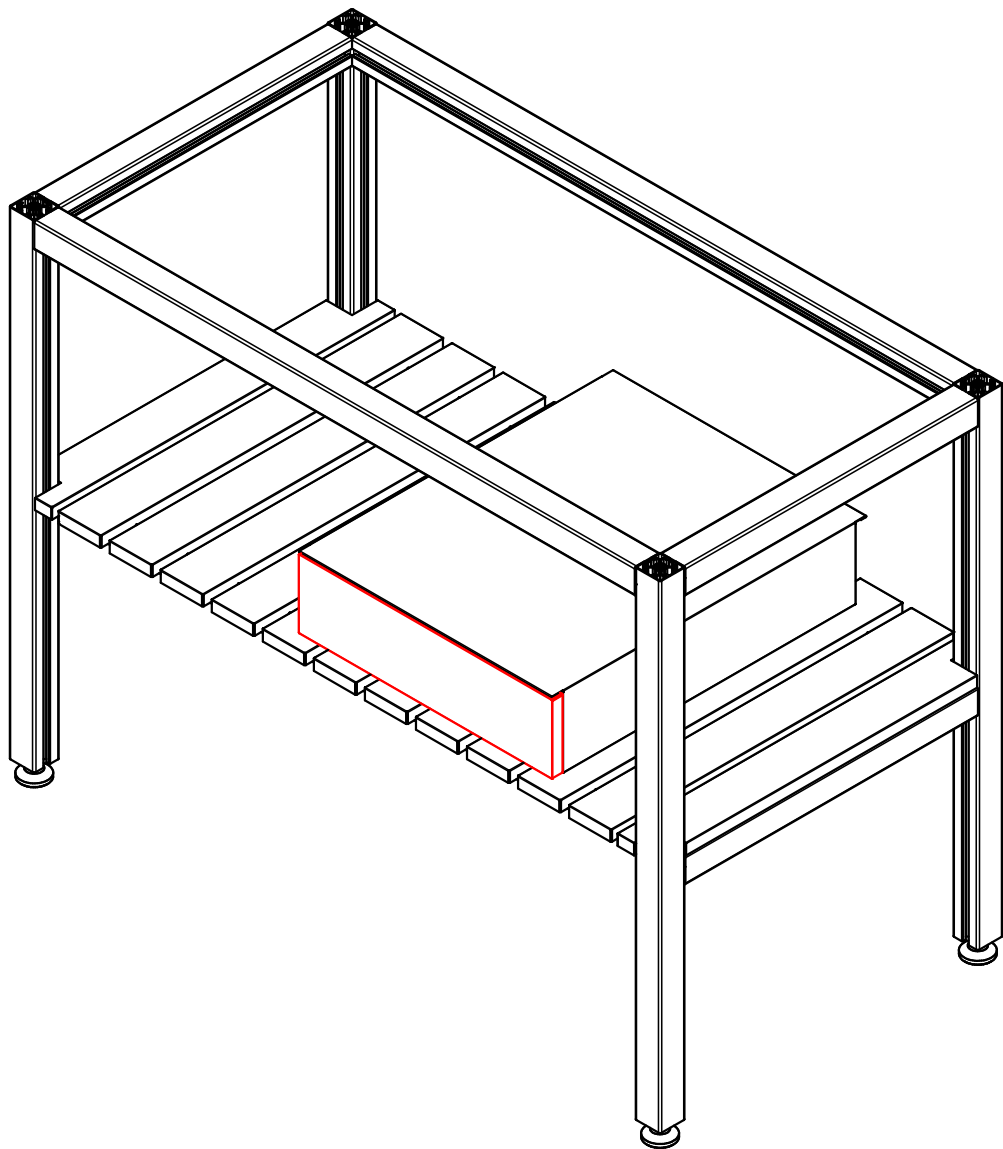


9. Reattach Magnetic Back Panel to Storage Box.

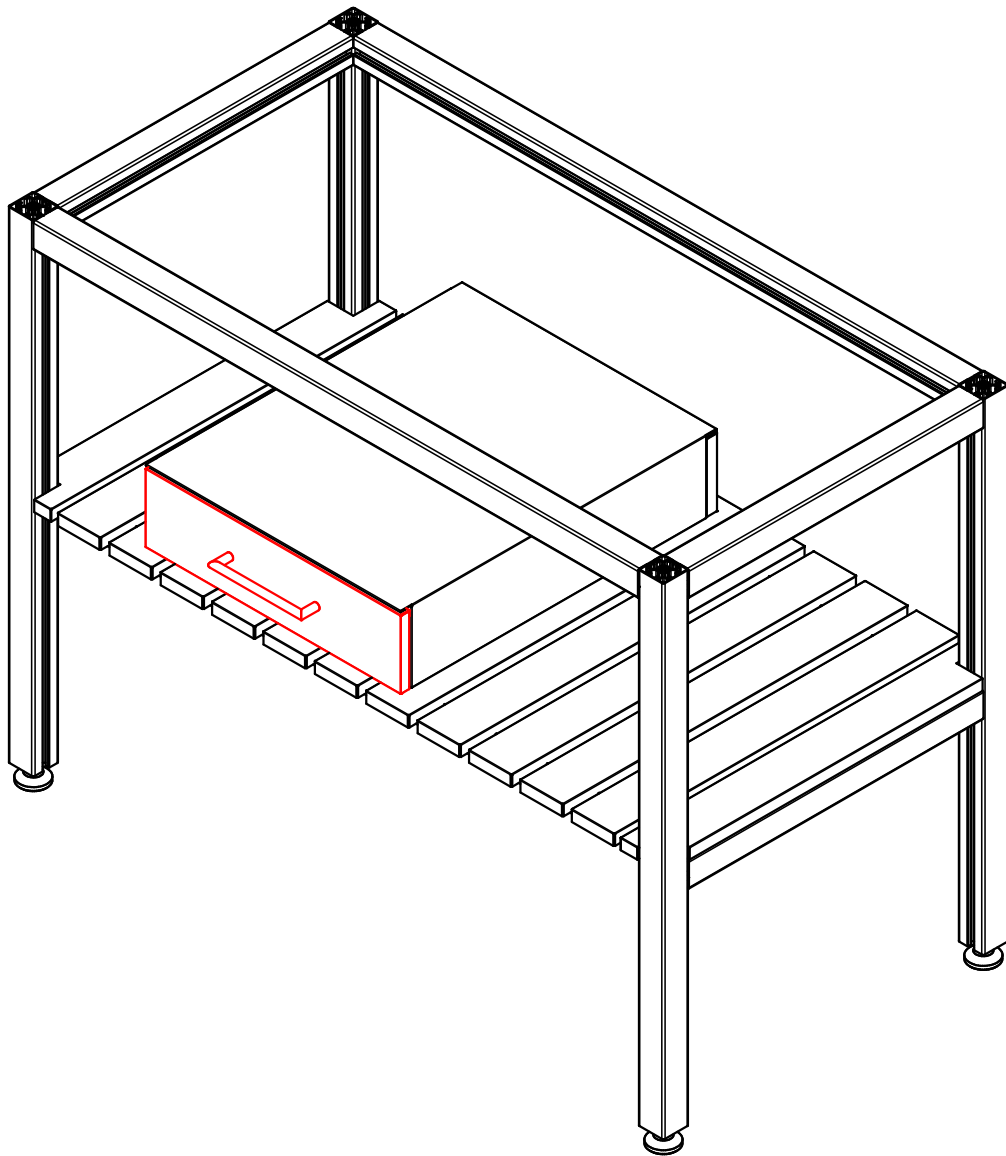

10. Reattach Drawers to Storage Box.


ASSEMBLY: Attaching Top Mount Accessory

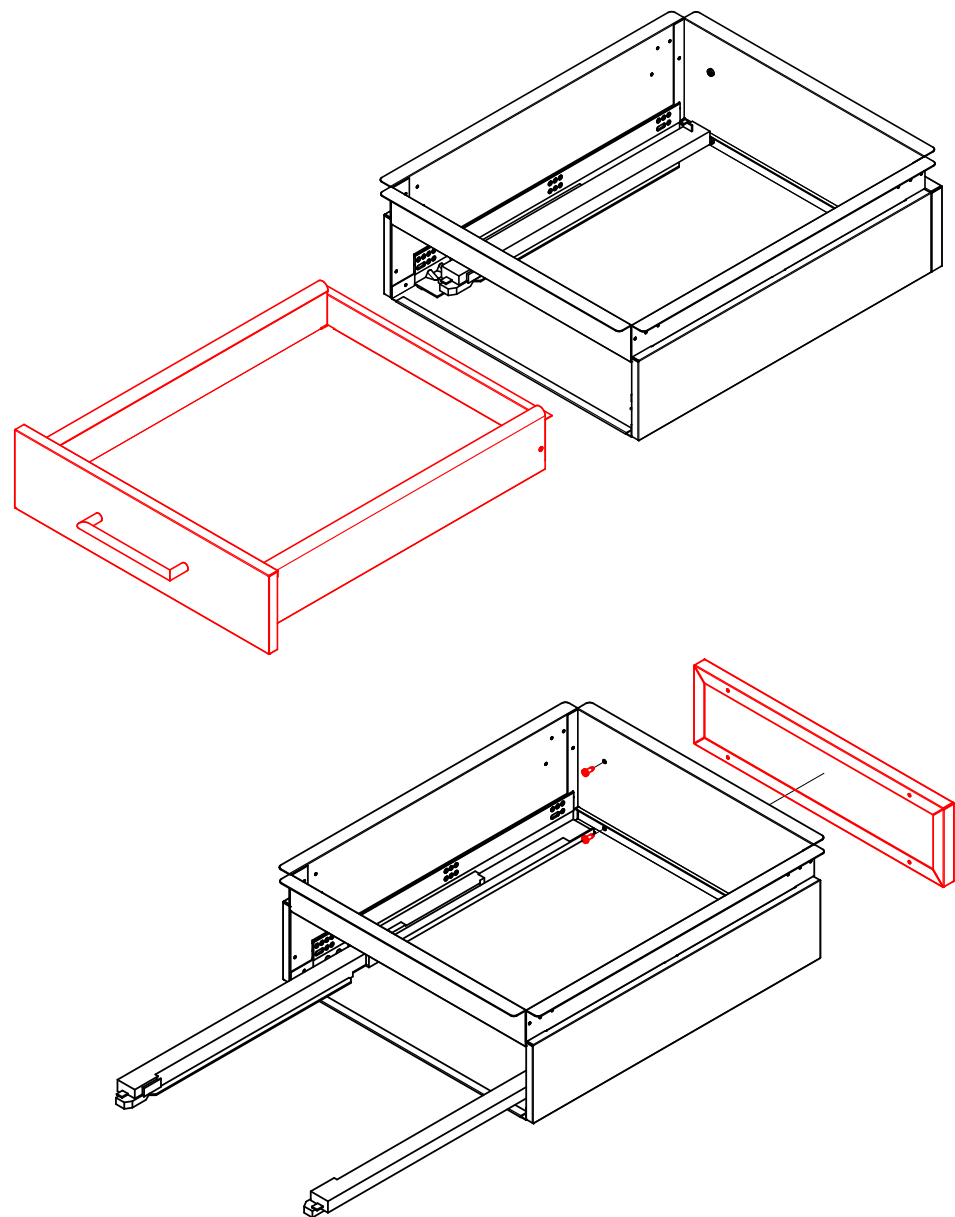

1. Remove Drawer from Storage Box.


2. Remove #10 Screws (4x) from back, remove back panel.

ASSEMBLY: Attaching Top Mount Accessory

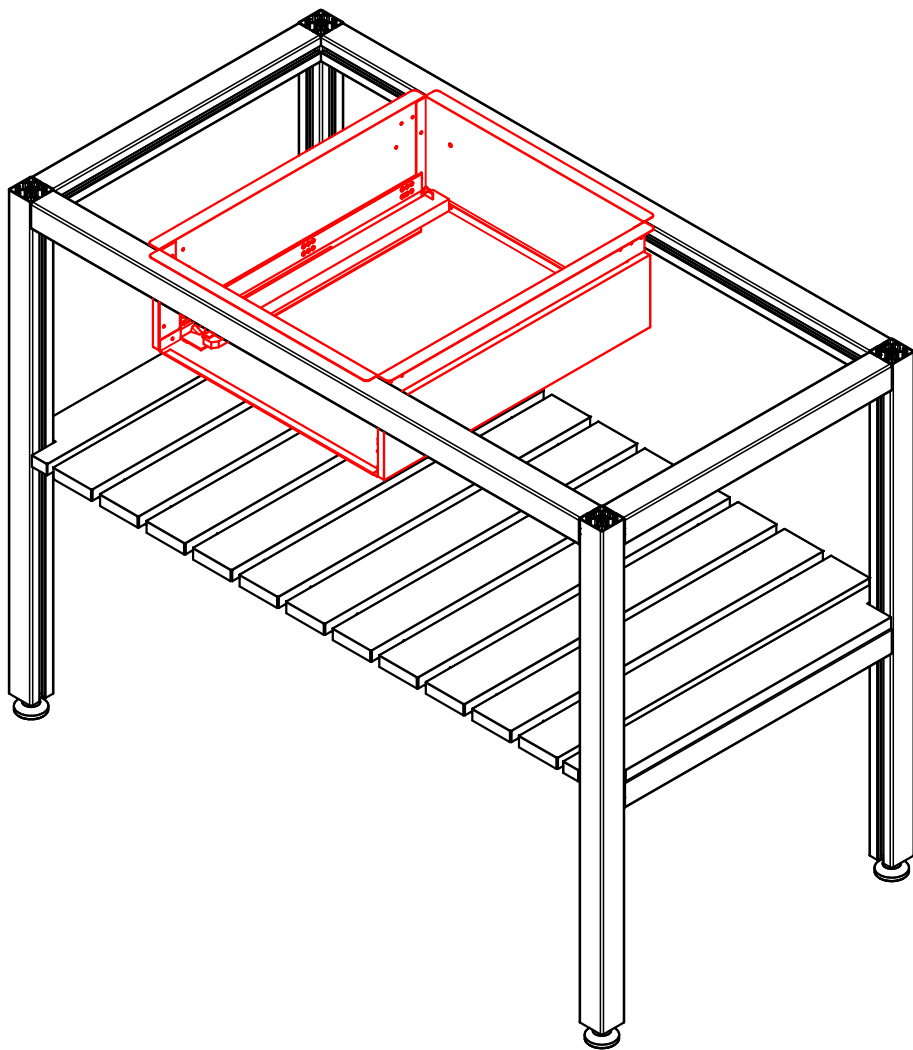


3. Place Top-Mounted Accessory between Upper Rails.

ASSEMBLY: Attaching Top Mount Accessory

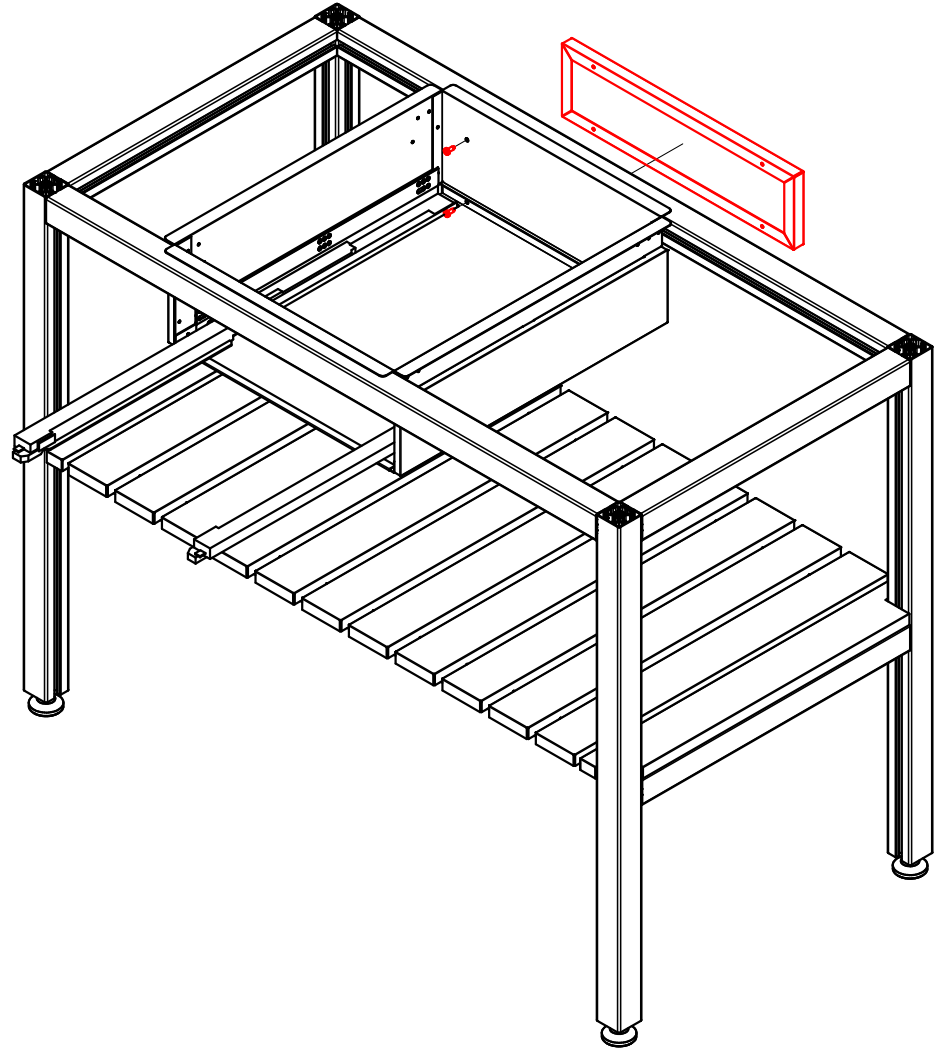

4. Reattach Back Panel using #10 Screws (4x).

ASSEMBLY: Attaching Top Mount Accessory

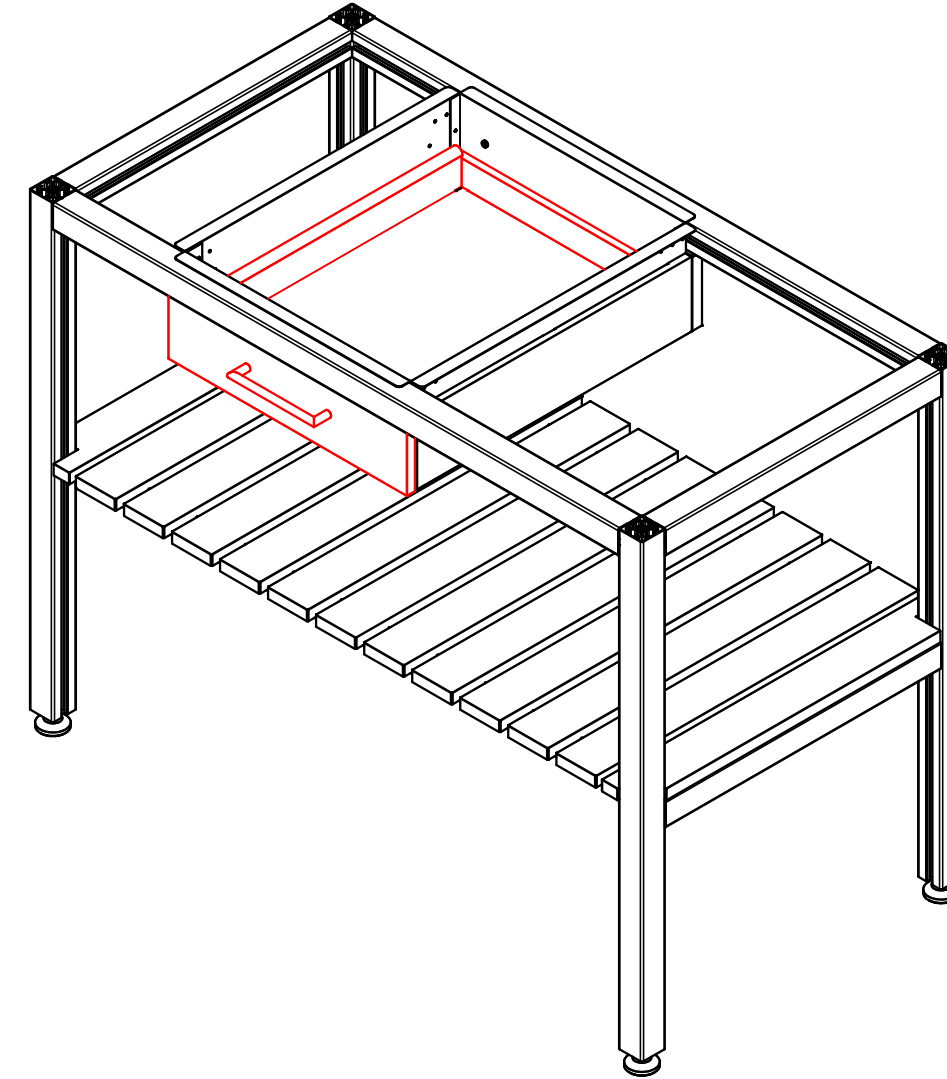

5. Reattach Drawer to Storage Box.

